



SHENZHEN KINGHELM ELECTRONIC CO., LTD.

## 433MHZ Rubber Antenna

Model : KH-433-2-JB

### Antenna componentst

Frequency range	WIFI:(433GHz)
VSWR	<4.0
Input Impedance	50 ( Ω )
Polarization	Vertical Polarization
(2dB) HPW	180° H-plane 120° E-plane

RF by		Checked by	
ME by		Date	
Customer Confirm			

### Revision History

Date	Revision	Description of Changes
2020-3-25	RA	Measured with SUS301 sample.



<b>2DB-433 Antenna PROJECT.....</b>	<b>1</b>
<b>ANTENNA COMPONENTS.....</b>	<b>1</b>
<b>1 TECHNICAL SUMMARY.....</b>	<b>2</b>
<b>2 GENERAL DESCRIPTION.....</b>	<b>3</b>
2.1 Components/Part revisions.....	3
<b>3 MECHANICAL DESCRIPTION.....</b>	<b>3</b>
<b>4 ELECTRICAL PERFORMANCE.....</b>	<b>3</b>
4.1 Set-up.....	3
4.1.1 VSWR.....	3
4.1.2 Gain & Radiation Patterns.....	3
4.1.3 Matching Circuit Description.....	3
4.2 Measurement Data.....	4
4.2.1 Active result (GSM) .....	4
<b>6 Mechanical drawing.....</b>	<b>5</b>
<b>7 RELIABILITY TESTS.....</b>	<b>7</b>
7.1 Test content.....	7
7.2 Test results.....	7
<b>8 CONCLUSION.....</b>	<b>9</b>

## **1 Technical Summary**

This report summarizes the electrical results of the proposed antenna to support the **2DB-433** Antenna program. We test the antenna with the latest version handset, and it seems to be acceptable.

## **2 General Description**

### **2.1 Components/Part revisions**

VSWR: Voltage Standing Wave Rate.

## **3 Mechanical Description**

## **4 Electrical Performance**

### **4.1 Set-up**

#### **4.1.1 VSWR**

VSWR measurements (S11) were performed using an Agilent 8753D Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

#### **4.1.2 Gain & Radiation Patterns**



The gain of the antenna was measured in the Lxc's anechoic chamber. Coaxial chokes on the feed cable were used to mitigate surface currents. The chamber provides less than -30 dB reflectivity from 800 MHz through 3 GHz and an 18" diameter spherical quite zone. The measurement results are calibrated using both dipole and leaky wave horn standards.

#### **4.1.3 Matching Circuit Description**


### **4.2 Measurement Data**

#### **4.2.1 Active result (433WIFI)**

Passive Test For 433		
Freq (MHz)	Effi (%)	Gain (dBi)
420	41.76	1.08
422	41.96	1.09
425	42.85	1.13
430	42.76	1.27
433	43.11	1.69
438	44.58	1.72

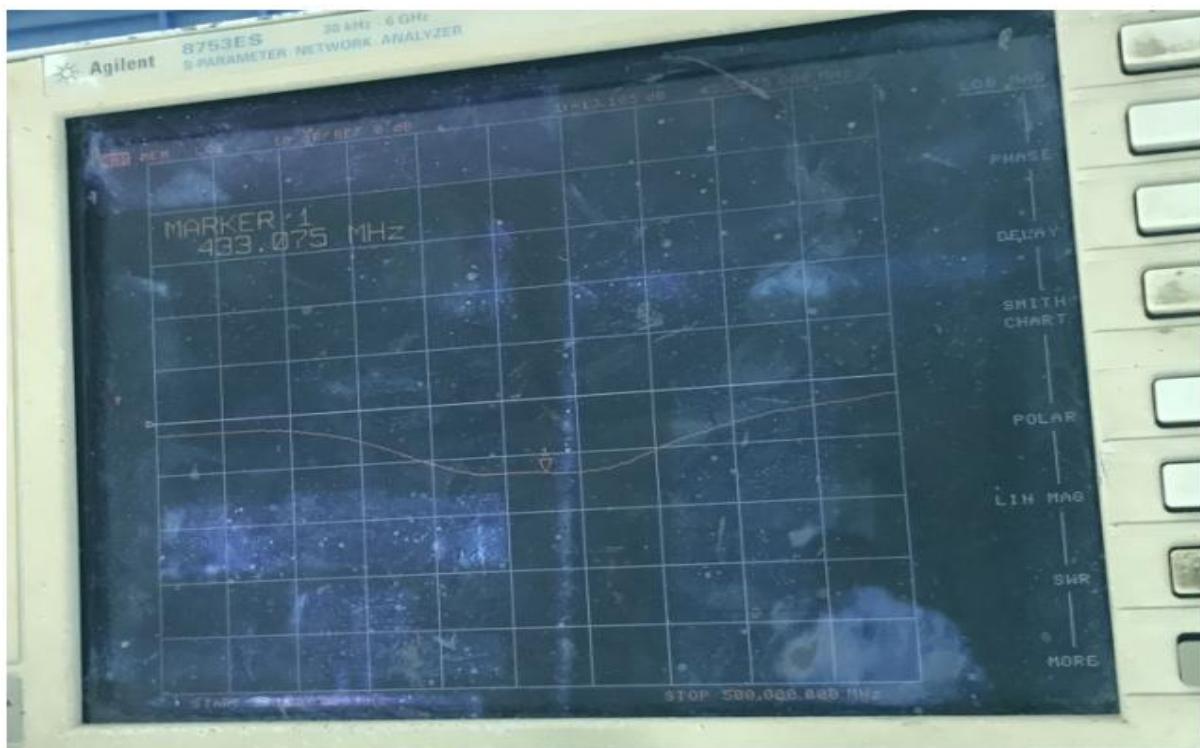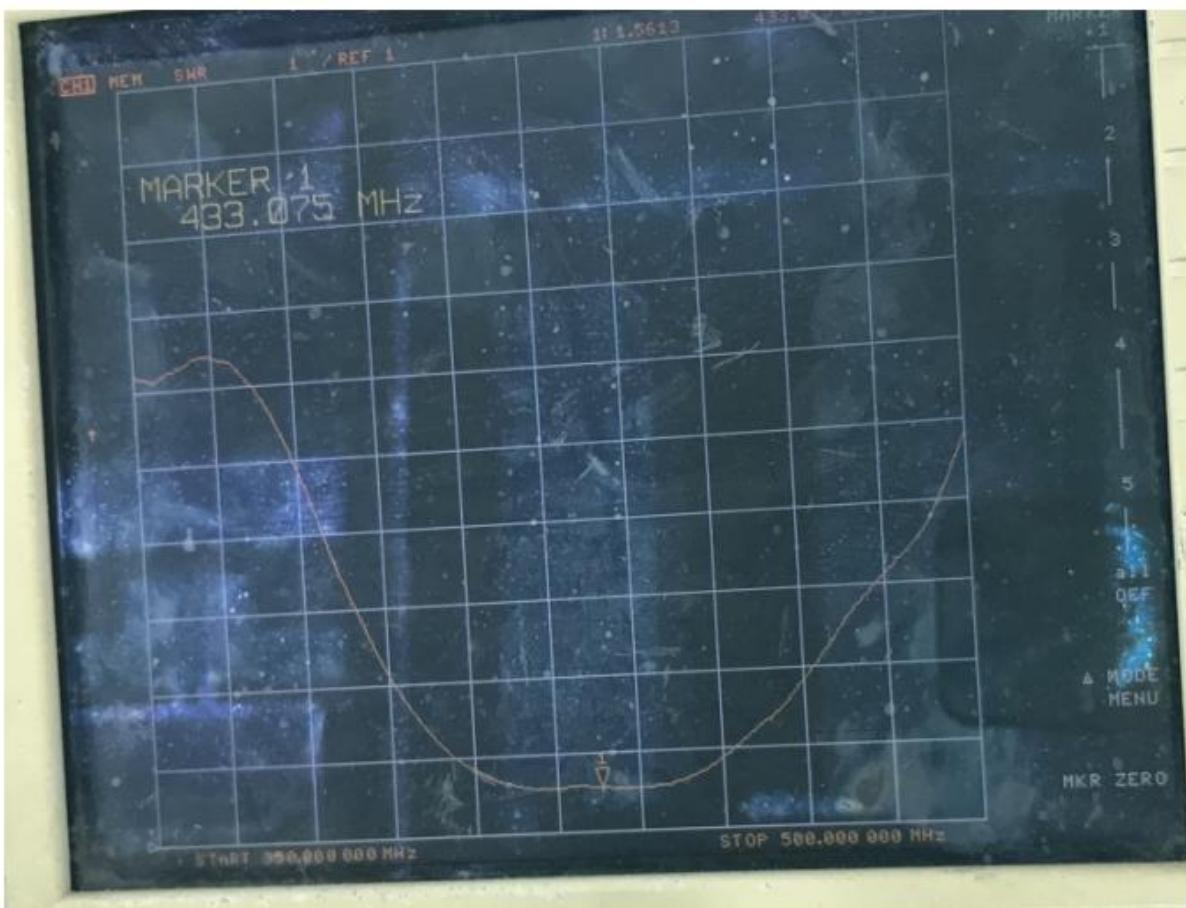

## 6 Mechanical drawing

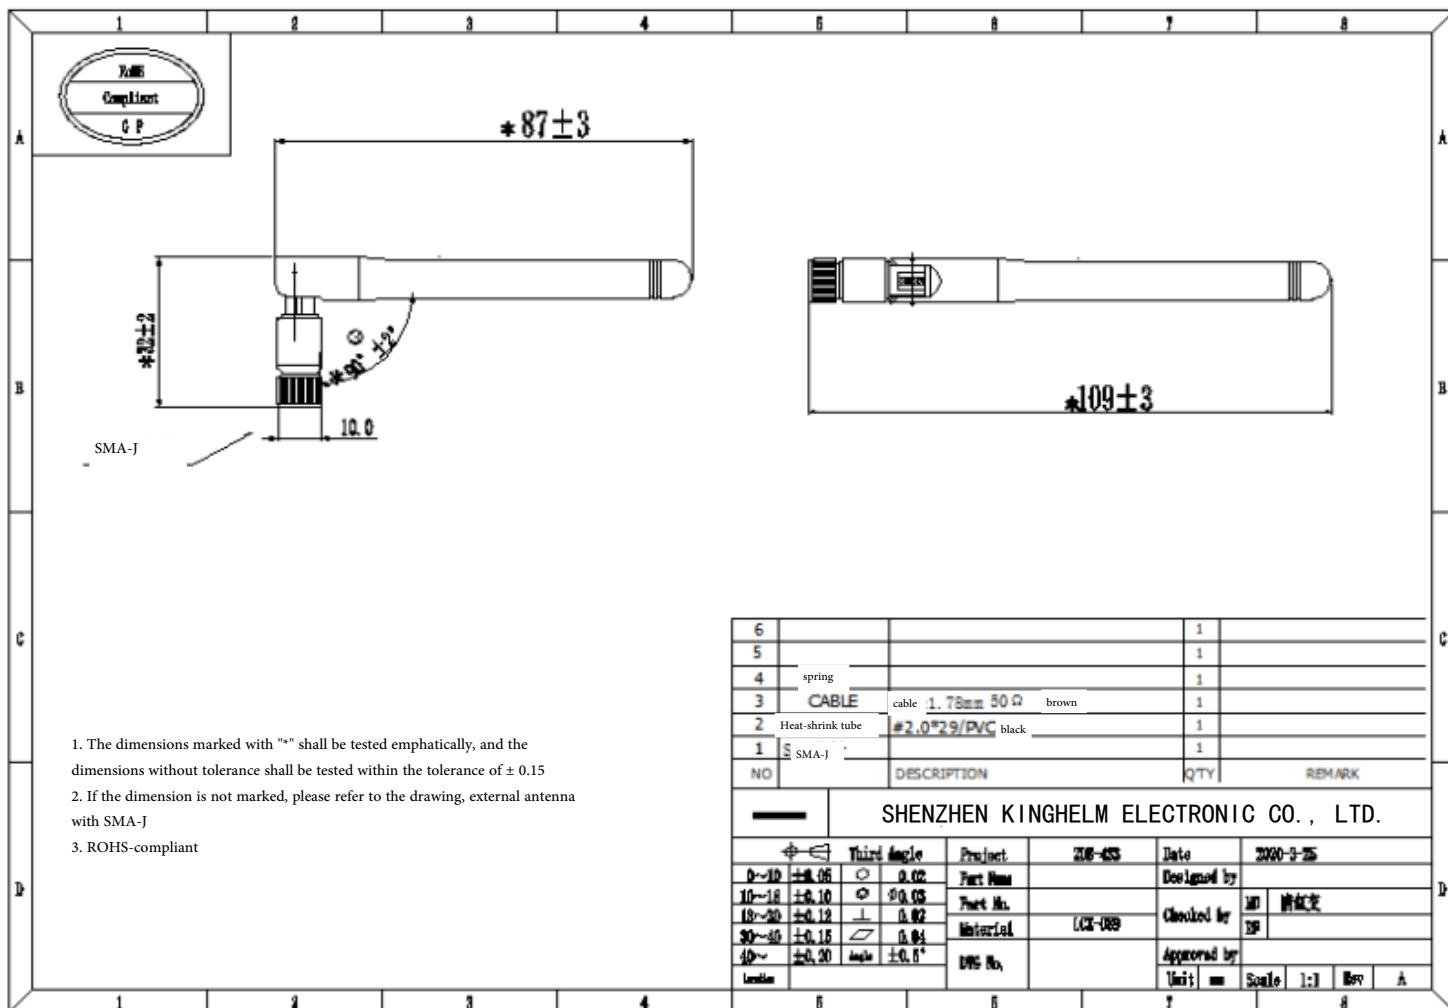

## 7 Reliability tests

### 7.1 Test content

No	Test item	Test mode	Criteria
1	Salt Spray Test	48-hour salt spray test with 5% salt resolution	There shall be no discoloration, skewing (deformation) and falling off, and the corrosion area shall not be too large

### 7.2 Test results

NO	Sample size	Test period	Result	Remark
1	50	24 hours	<b>OK</b>	Technical grade: grade 9 (corrosion<0.4mm)
2	50	48 hours	<b>OK</b>	Technical grade: grade 9 (corrosion<0.4mm)

## 8 Conclusion

