


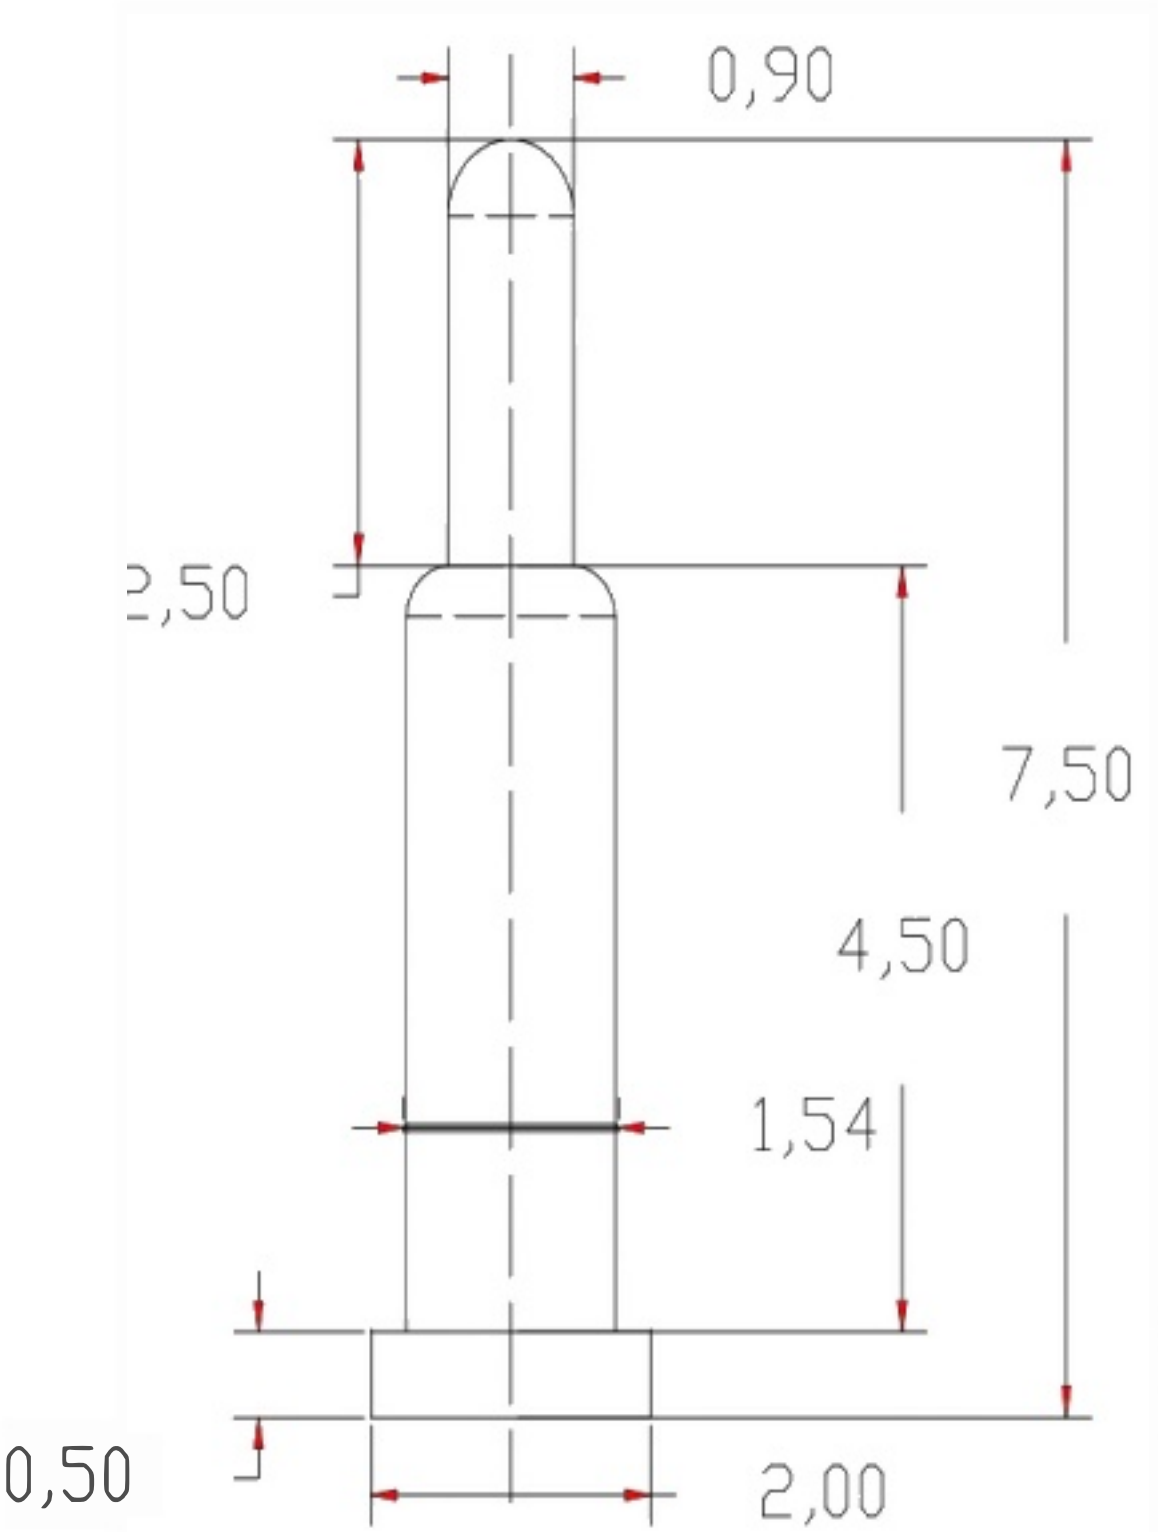

1.Material and Plating:

- Pin Cylinder: Brass alloy, nickel-plated 50-60μ", gold-plated 1μ".
- Pin Head: Brass alloy, nickel-plated 50-60μ", gold-plated 1μ".

2.Operating Current: 1.0A

3.Operating Voltage: Below 12V @ 25°C

4.Salt Spray Test: No corrosion after 24 hours in 5% salt solution.

5.Solderability Test: Wetting solder at 230 ± 5°C for 1 second
with solder coverage rate above 95%.

Shenzhen Kinghelm Electronics Co., Ltd				www.kinghelm.net						
KH-PG207505-DZ				0755-83044319						
		Third Angle Projection		Item Name	pogopin		Date	2017/10/11		
Tolerances Not Specified Refer to Standards			0.02	Specification	PG2.0-7.5-0.5T		Design	Mr. He		
0 = ±0.1			ø0.03	Material	Copper Rod C3604		Review	Mr. Lai		
0.0 = ±0.05			0.02	Customer Part Number			Recognise	Mr. Zhang		
0.00 = ±0.02			0.04	Surface Treatment	Gold-plated		Unit	mm		
0.000 = -			0.02	Drawing Number	XYX-00031		Scale	1:1	Version	REV: A
Do Not Measure According to Drawings										

Date	Revision Contents			Version	Notes