


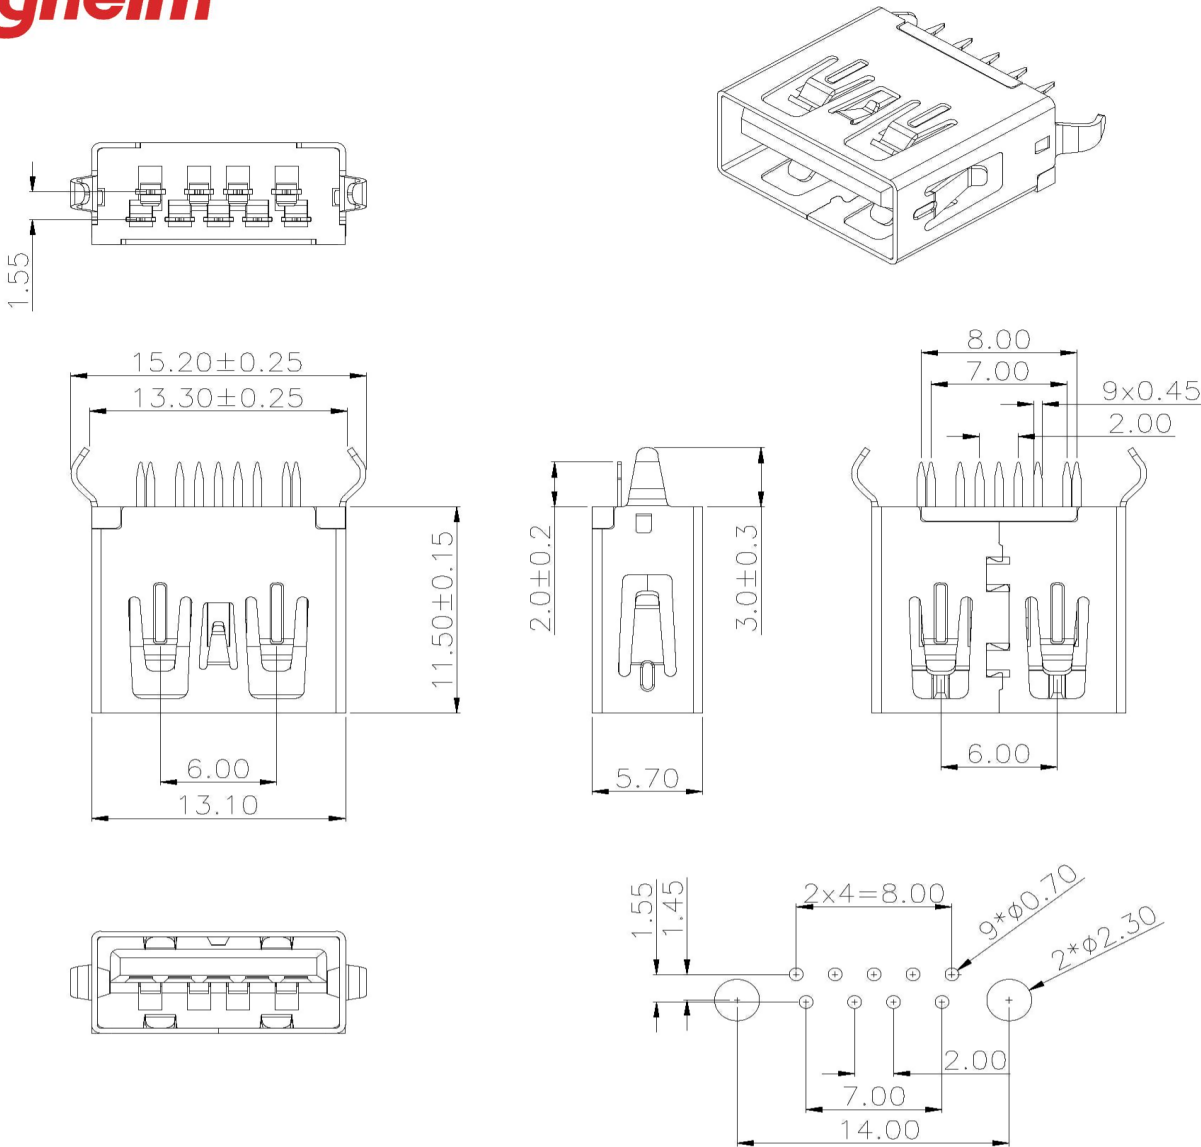

Technical Specifications:
Rated Voltage & Current: DC 30V / 1.0A
Contact Resistance: 30mΩ Max
Insulation Resistance: 100MΩ Min
Dielectric Withstanding Voltage: DC 500V
Mating Force: 5~35N
Durability: 1500 cycles

Finished Product Code: TZ U01XXXXX1

Product Identification Code (USB 3.0)

Shell Material: 1. Iron Shell 2. Copper Shell 3. Stainless Steel 4. Other

Terminal Plating: 1. 1μ" Gold Plating 2. 3μ" Gold Plating 3. 5μ" Gold Plating

Flow Code

Packaging: 1. PE Bag 2. Suction Cup 3. Compounding Bag 4. Tube Packaging

Color Options: 1. White 2. Black 3. Red 4. Yellow 5. Blue 6. Green 7. Gray

Plastic Materials: 1. PBT 2. LCP 3. PA6T 4. PA9T 5. PA46

C	/	Shell	Iron Shell	Nickel Plating	50U" Min
B	/	PIN	Brass	Gold Plating	1U" Min
A	/	Base	PA9T	Blue	V-0
No.	Material Part No.	Name	Material	Plating/Color	Thickness /Flame Resistance

					视角	未注 X. ±0. 30 X° . ±2° 明公 . X±0. 20 . X° . ±1° 差 . XX±0. 15 . XX° . ±1° 差 . XXX±0. 05 . XX° . ±0. 5°				USB 3.0 Female Receptacle (180°) (L11.50) with Flat Type		
标记	处数	更改文件号	签 字	日期								
设 计					Drawing	Marking	Weight	Scale				
审 核								1 : 1				
工 艺					共 1 页		第 1 页					
						Shenzhen Kinghelm Electronics Co., Ltd.					www.kinghelm.net	
标 准 化						KH-3.0AF180WJ-11.5					0755-83044319	
批 准												