


**Kinghelm®**

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

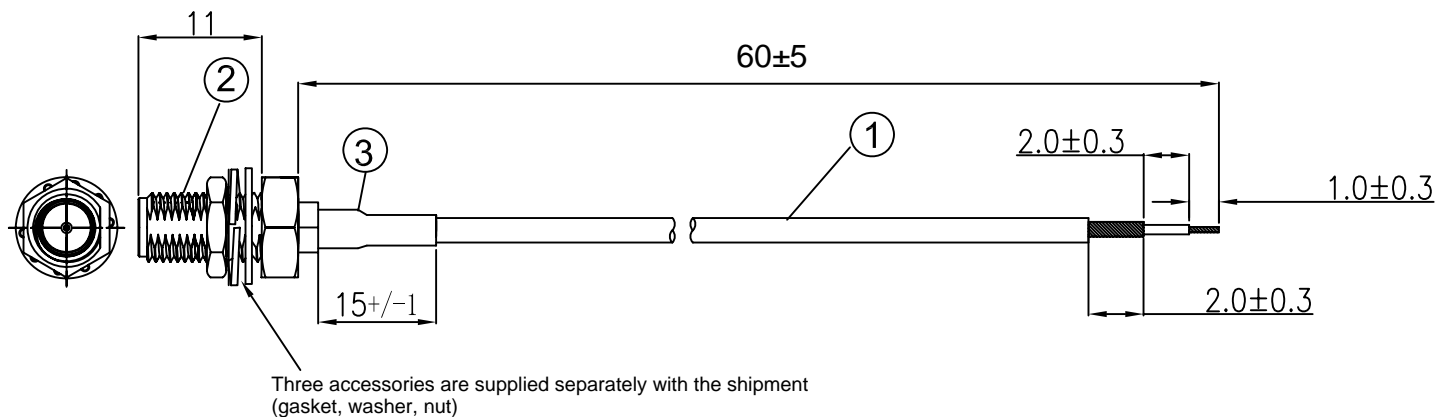

**NOTES:**

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
  - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
  - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
③	Sleeve	Black Heat Shrink Tube, OD: 2.0 mm	AS
②	Connector	SMA Female Connector with Female Pin, Detachable Type, 11 Threads, Gold-Plated	1
①	Coaxial Cable	RF 0.81 Black Cable, OD: 0.81 mm	AS

**Shenzhen Kinghelm Electronics Co., Ltd.**

**Model : KH-122-081SMA-60**

**www.kinghelm.net**

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2020-06-15	SMA /F TO OPEN L= 60MM	
	ENG.			
COMPUTER GENERATED IN SOLIDWORKS	MFG.			
DO NOT SCALE THIS DRAWING	Q.A.			
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		SIZE B	REV A
CUSTOMER P/N:			SCALE: Free	SHEET 1 OF 1