


Kinghelm®

| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |
| | | | | | |

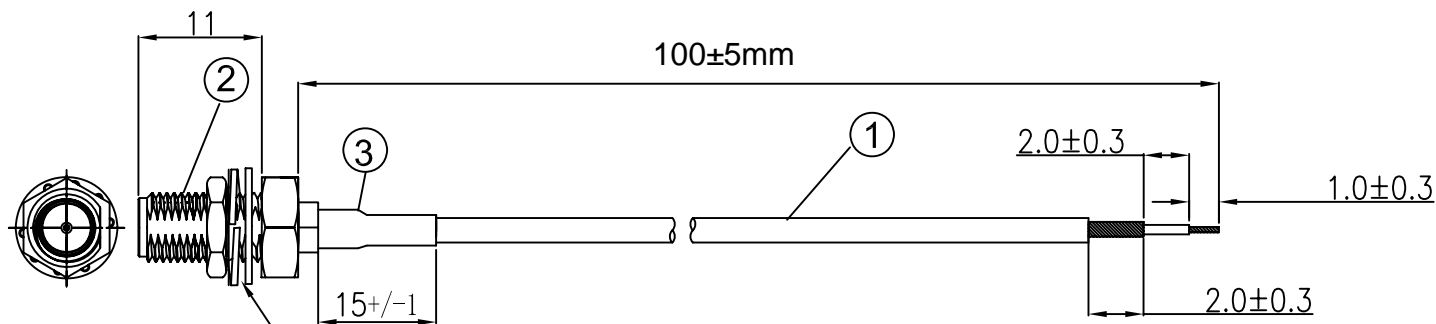

Three accessories are shipped separately as additional items
(gasket, washer, nut)

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|---------------|---|------|
| ③ | Sleeving | Black Heat Shrink Tubing, OD: 2.0mm | AS |
| ② | Connector | SMA Female Connector with Female Pin, Split Type, 11 Threads, Gold-Plated | 1 |
| ① | Coaxial Cable | RF 1.37 Black Cable, OD: 1.37mm | AS |

Shenzhen Kinghelm Electronics Co., Ltd.

www.kinghelm.net

Model: KH-122-137SMA-100

ALL DIMENSION
ARE IN MM

DRAWN
Jamy

DATE
2020-06-15


ENG.

COMPUTER GENERATED
IN SOLIDWORKS

MFG.

DO NOT SCALE
THIS DRAWING

Q.A.



GENERAL TOLERANCE FOR
ANGLES X.X X.XX X.XXX
± 1° ± 0.3 ± 0.25 ± 0.150

SMA /F TO OPEN L= 100mm

SIZE Number

B

REV

A

SCALE: Free

TYPE

SHEET 1 OF 1

CUSTOMER P/N: