


**Kinghelm®**

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

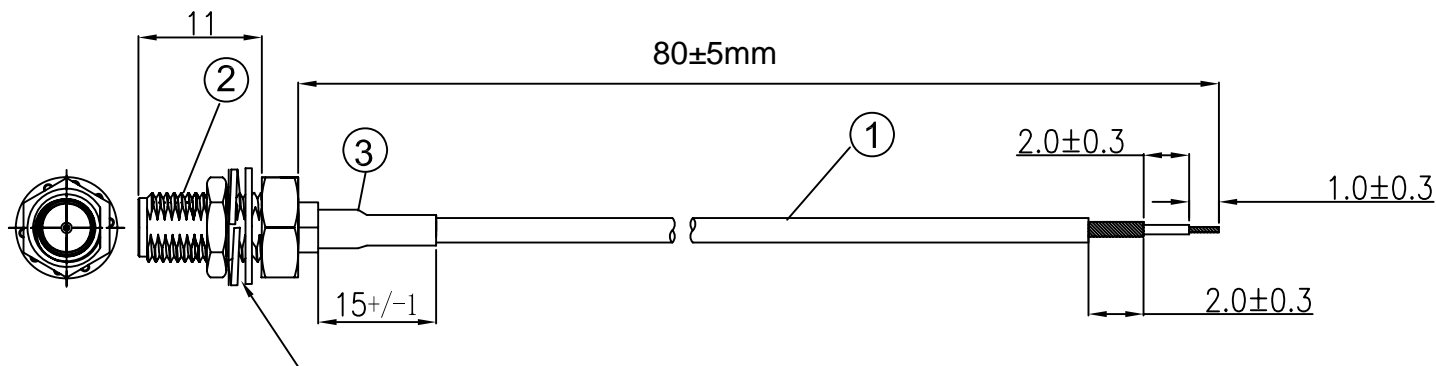

Three accessories are provided separately with the shipment:  
(gasket, awasher, and nut)

**NOTES:**

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
  - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
  - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
③	Sleeve	Black heat shrink tubing, OD: 2.0mm	AS
②	Connector	SMA female connector with female pin, separate type, 11 threads, gold-plated	1
①	Coaxial cable	RF 1.13 black coaxial cable, OD: 1.13mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

[www.kinghelm.net](http://www.kinghelm.net)

Model: KH-122-SMA-80

ALL DIMENSION  
ARE IN MM

DRAWN Jamy

DATE 2020-06-15


ENG.

COMPUTER GENERATED  
IN SOLIDWORKS

MFG.

DO NOT SCALE  
THIS DRAWING

Q.A.



GENERAL TOLERANCE FOR  
ANGLES X.X X.XX X.XXX  
± 1° ± 0.3 ± 0.25 ± 0.150

SMA /F TO OPEN L=80 mm

SIZE Number

B

REV

A

SCALE: Free

TYPE

SHEET 1 OF 1

CUSTOMER P/N: