


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

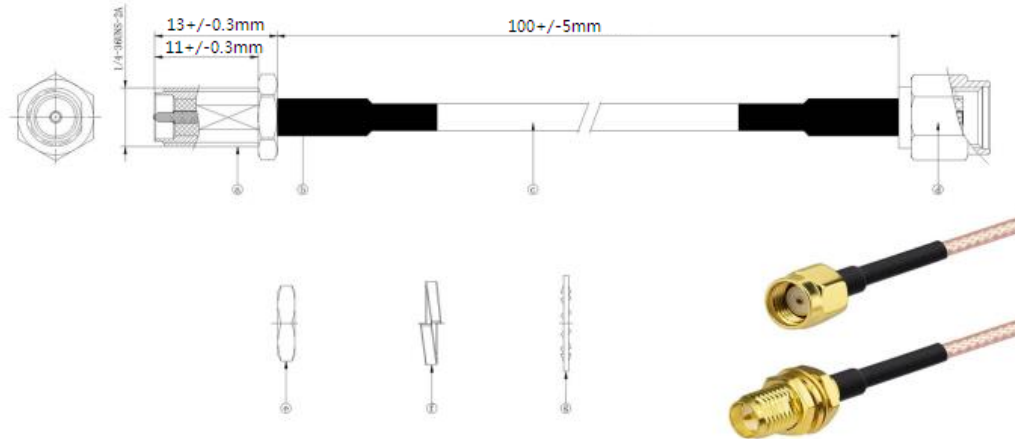

The three accessories are shipped separately as additional items
(2 washers and 1 nut).

caleloss =>0.1--0.3dbm

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
- MATERIAL:
 - SEE TABLE
- MECHANICALL:
 - SMA PULL FORCE: 12.0KGS.
- ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeve	Black heat shrink tubing, OD: 4.0mm	AS
③	Line loss	01---0.3dBm	1
②	Connector	SMA female (inner thread, inner hole) to male (outer thread, inner pin) adapter, 11-thread, gold-plated	1
①	Coaxial cable	RG316, OD: 2.4mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2018 /05 /04	Model: KHB(RG316)-SMA-100-28	
	ENG.		TITLE RF CABLE SMA 300MM	
	MFG.			
	Q.A.			
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING	PROJECTION 		GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150	
SIZE B		Number		REV A
SCALE: Free		TYPE	SHEET 1 OF 1	

CUSTOMER P/N:

技术详询