


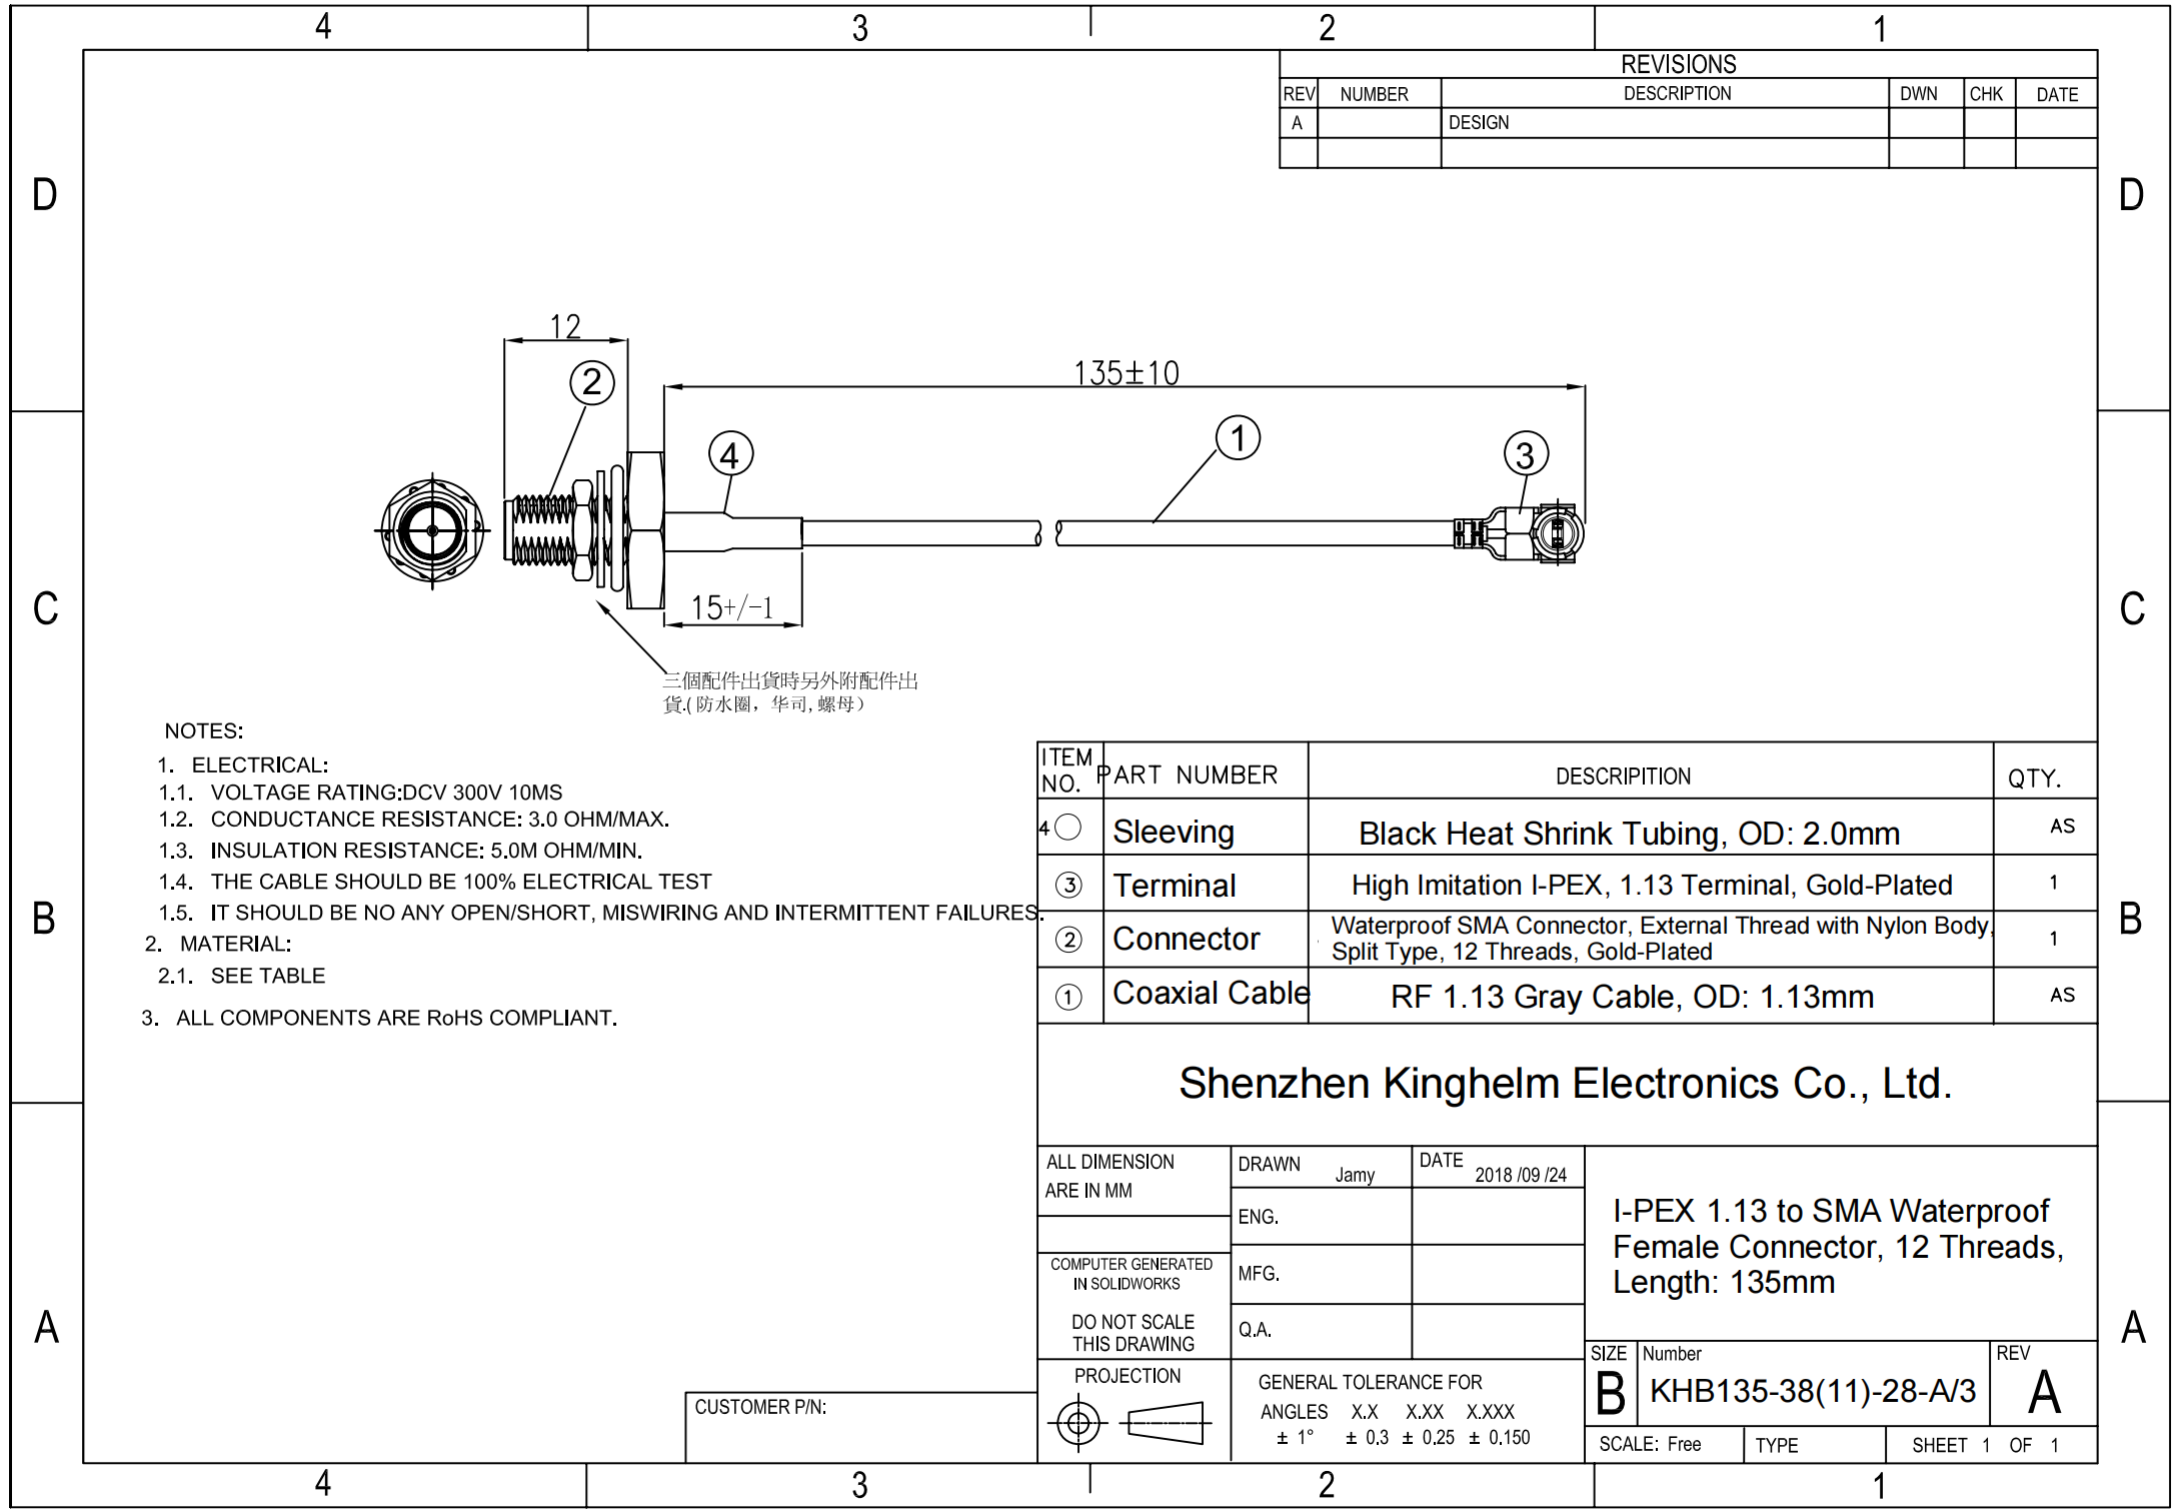

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

- 2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
4	Sleeving	Black Heat Shrink Tubing, OD: 2.0mm	AS
③	Terminal	High Imitation I-PEX, 1.13 Terminal, Gold-Plated	1
②	Connector	Waterproof SMA Connector, External Thread with Nylon Body, Split Type, 12 Threads, Gold-Plated	1
①	Coaxial Cable	RF 1.13 Gray Cable, OD: 1.13mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

ALL DIMENSION ARE IN MM	DRAWN	Jamy	DATE	2018 /09 /24			I-PEX 1.13 to SMA Waterproof Female Connector, 12 Threads, Length: 135mm		
	ENG.								
	COMPUTER GENERATED IN SOLIDWORKS		MFG.						
	DO NOT SCALE THIS DRAWING		Q.A.						
PROJECTION		GENERAL TOLERANCE FOR				SIZE	Number		REV
		ANGLES X.X X.XX X.XXX				B	KHB135-38(11)-28-A/3		A
		± 1° ± 0.3 ± 0.25 ± 0.150				SCALE: Free		TYPE	SHEET 1 OF 1

CUSTOMER P/N: