


Kinghelm®

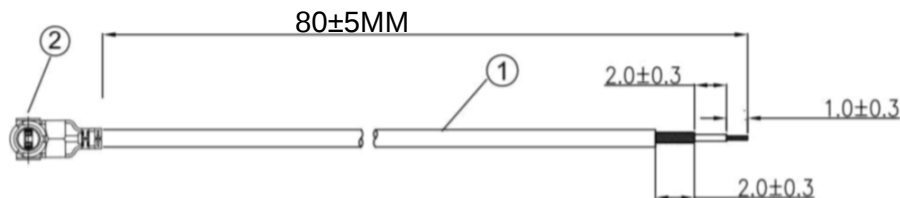

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

- 2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

NO.	PART	DESCRIPTION	QYT.
			AS
②	CONNECTOR	3rd Generation IPEX Connector	1
①	Coaxial Cable	RF0.81 Black Coaxial Cable,OD:0.81mm	AS

Shenzhen Kinghelm Electronics Co., Ltd

www.kinghelm.net

KH-(RG0.81)-TX80-IPEX3-221

ALL DIMENSION
ARE IN MM

DRAWN
Jamy

DATE
2020-06-15

ENG.


COMPUTER GENERATED
IN SOLIDWORKS

MFG.

DO NOT SCALE
THIS DRAWING

Q.A.

PROJECTION



GENERAL TOLERANCE FOR
ANGLES X.X X.XX X.XXX
± 1° ± 0.3 ± 0.25 ± 0.150

SIZE Number

B

REV

A

SCALE: Free

TYPE

SHEET 1 OF 1

CUSTOMER PIN: