


Kinghelm®

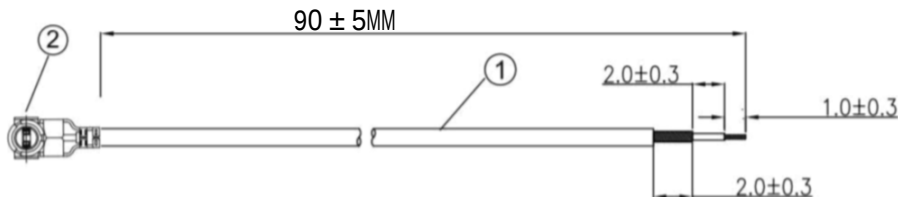

NOTES:

1. ELECTRICAL:

1.1. VOLTAGE RATING:DCV 300V 10MS

1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.

1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.

1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST

1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING
AND INTERMITTENT FAILURES.

2. MATERIAL:

2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

NO.	PART	DESCRIPTION	QYT.
			AS
②	CONNECTOR	3rd Generation IPEX Connector	1
①	Coaxial Cable	RF0.81 Black Coaxial Cable,OD:0.81mm	AS

Shenzhen Kinghelm Electronics Co., Ltd

www.kinghelm.net

KH-(RG0.81)-TX90-IPEX3-221

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2020-06-15	SIZE Number REV A
	ENG.		
COMPUTER GENERATED IN SOLIDWORKS	MFG.		
DO NOT SCALE THIS DRAWING	Q.A.		
PROJECTION 	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		SCALE: Free TYPE SHEET 1 OF 1

CUSTOMER PIN: