


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

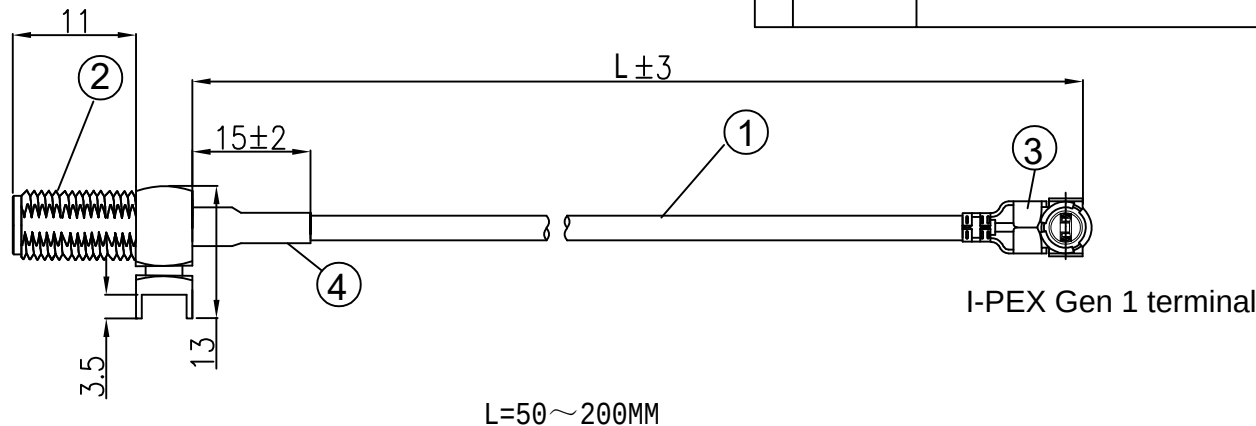

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
- ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeve	Black heat shrink tubing, OD: 2.0mm	AS
③	Terminal	High-quality I-PEX imitation, 1st generation 1.13 terminal, gold-plated	1
②	Connector	SMA female with female pin, integrated 4-leg full-thread design, gold-plated, outer thread with inner hole	1
①	Coaxial cable	RF1.13 cable, black coaxial cable, OD: 1.10mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

www.kinghelm.net

KH-IPEX-SMAKWE-Q50H

ALL DIMENSION
ARE IN MM

DRAWN
Jamy

DATE
2022-12-12

ENG.

COMPUTER GENERATED
IN SOLIDWORKS


MFG.

DO NOT SCALE
THIS DRAWING

Q.A.

I-PEX 1.13 to SMA Female,
4-Leg Full-Thread,
L=50mm

PROJECTION



GENERAL TOLERANCE FOR
ANGLES X.X X.XX X.XXX
± 1° ± 0.3 ± 0.25 ± 0.150

SIZE Number

B

REV

A

SCALE: Free

TYPE

SHEET 1 OF 1

CUSTOMER P/N: