


Kinghelm®

Model: KH-IPEX4-SMA-RG081-120mm

REVISIONS

REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

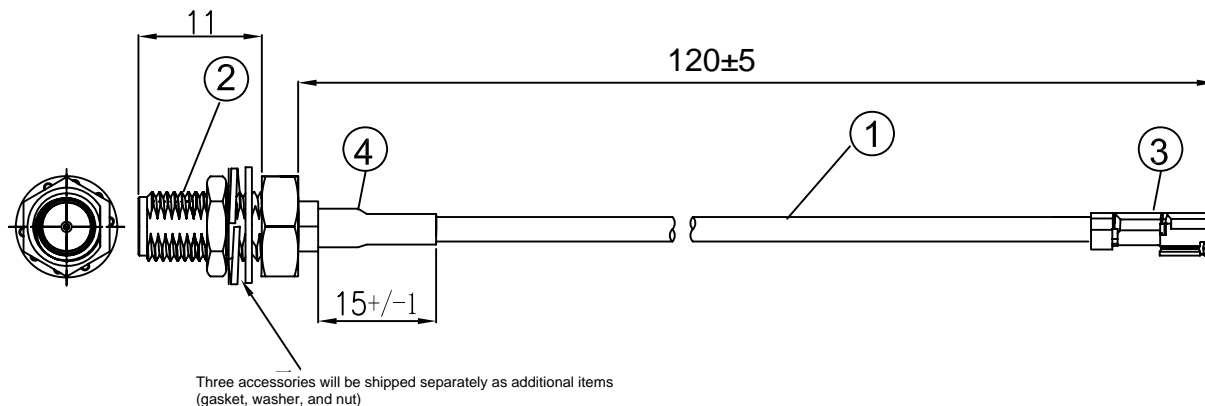

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

- 2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeve	Sleeve Black Heat Shrink Tube, OD: 2.0mm	AS
③	Terminal	Terminal High Imitation I-PEX 0.814 Generation Terminal	1
②	Connector	Gold-Plated SMA Female Connector with Female Pin, Split Type, 11 Threads	1
①	Coaxial Cable	Gold-Plated RF 0.81 Cable, Color: Black, OD: 0.81mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2020-06-18	I-PEX 0.81 (Generation 4) to SMA Female Cable, Length: 120mm	
	ENG.			
COMPUTER GENERATED IN SOLIDWORKS	MFG.			
DO NOT SCALE THIS DRAWING	Q.A.		SIZE Number	REV
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		B	A
CUSTOMER P/N:		SCALE: Free	TYPE	SHEET 1 OF 1