


Kinghelm®

Model: KH-IPEX4-SMA-RG081-180mm

REVISIONS

REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

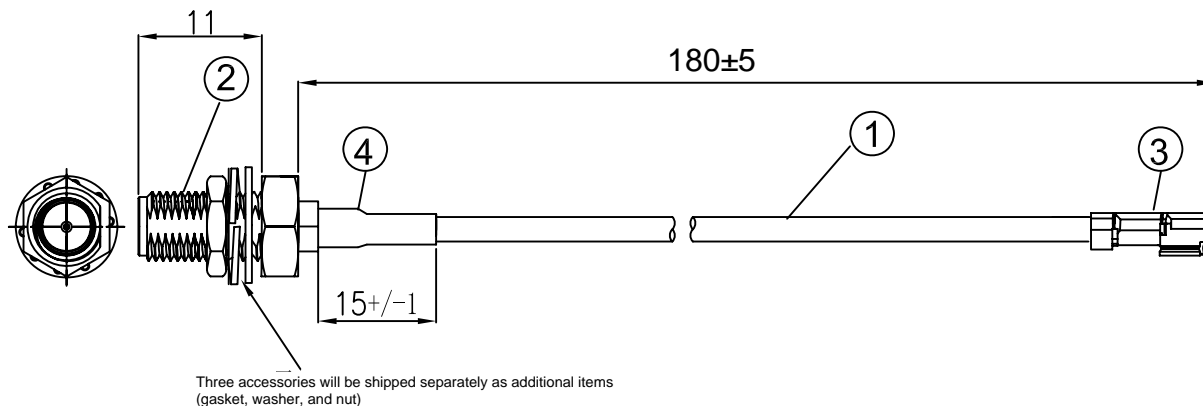

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

- 2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeve	Sleeve Black Heat Shrink Tube, OD: 2.0mm	AS
③	Terminal	Terminal High Imitation I-PEX 0.814 Generation Terminal	1
②	Connector	Gold-Plated SMA Female Connector with Female Pin, Split Type, 11 Threads	1
①	Coaxial Cable	Gold-Plated RF 0.81 Cable, Color: Black, OD: 0.81mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

ALL DIMENSION
ARE IN MM

DRAWN
Jamy

DATE
2020-06-18


ENG.

COMPUTER GENERATED
IN SOLIDWORKS

MFG.

DO NOT SCALE
THIS DRAWING

Q.A.



GENERAL TOLERANCE FOR
ANGLES X.X X.XX X.XXX
± 1° ± 0.3 ± 0.25 ± 0.150

I-PEX 0.81 (Generation 4) to SMA Female
Cable, Length: 180mm

SIZE
Number

REV

B

A

SCALE: Free

TYPE

SHEET 1 OF 1

CUSTOMER P/N: