


Kinghelm®

| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |
| | | | | | |

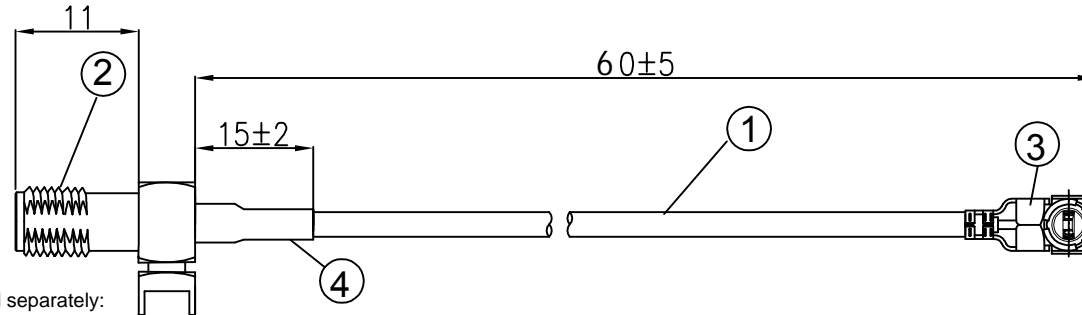

Three accessories are included and shipped separately:
gasket, washer, and nut.

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
- ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|---------------|---|------|
| ④ | Sleeve | Black heat shrink tubing, OD: 2.0mm | AS |
| ③ | Terminal | High-quality I-PEX compatible 1.13 terminal, gold-plated | 1 |
| ② | Connector | SMA female connector with female pin, 4-leg design, 11 threads, gold-plated | 1 |
| ① | Coaxial cable | RF1.13 black coaxial cable, OD: 1.13mm | AS |

Shenzhen Kinghelm Electronics Co., Ltd. www.kinghelm.net

KH-IPEXA-SMAKWE-B060H

| | | | | |
|-------------------------------------|---|-----------------|-----------------------------|--------------|
| ALL DIMENSION ARE IN MM | DRAWN James | DATE 2021-10-30 | I-PEX 1.13 TO SMA /F L=60mm | |
| | CHKD. Frank | 2021-10-30 | | |
| | APPD. Scott | 2021-10-30 | | |
| COMPUTER GENERATED IN SOLIDWORKS | | | | |
| DO NOT SCALE THIS DRAWING | | | | |
| PROJECTION | GENERAL TOLERANCE FOR ANGLES X.X X.XX ± 1° ± 0.3 0.25 0.150 | | SIZE Number B X.XXX | REV A |
| CUSTOMER P/N: | | SCALE: Free | TYPE | SHEET 1 OF 1 |