


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

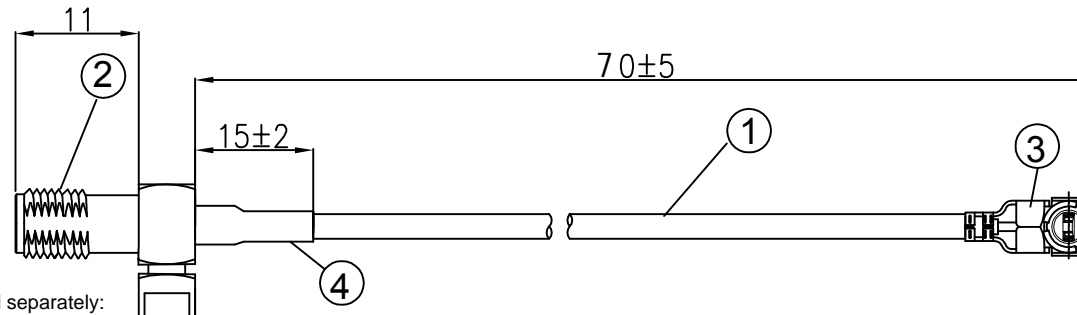

Three accessories are included and shipped separately:  
gasket, washer, and nut.

NOTES:

- ELECTRICAL:
  - VOLTAGE RATING:DCV 300V 10MS
  - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
  - INSULATION RESISTANCE: 5.0M OHM/MIN.
  - THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
  - SEE TABLE
- ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeve	Black heat shrink tubing, OD: 2.0mm	AS
③	Terminal	High-quality I-PEX compatible 1.13 terminal, gold-plated	1
②	Connector	SMA female connector with female pin, 4-leg design, 11 threads, gold-plated	1
①	Coaxial cable	RF1.13 black coaxial cable, OD: 1.13mm	AS

Shenzhen Kinghelm Electronics Co., Ltd. [www.kinghelm.net](http://www.kinghelm.net)

KH-IPEXA-SMAKWE-B070H

ALL DIMENSION ARE IN MM	DRAWN	James	DATE	2021-10-30	I-PEX 1.13 TO SMA /F L=70mm
	CHKD.	Frank		2021-10-30	
	APPD.	Scott		2021-10-30	
COMPUTER GENERATED IN SOLIDWORKS					
DO NOT SCALE THIS DRAWING					
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX ± 1° ± 0.3 0.25 0.150			SIZE Number B X.XXX	REV A
SCALE: Free TYPE			SHEET 1 OF 1		

CUSTOMER P/N: