


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

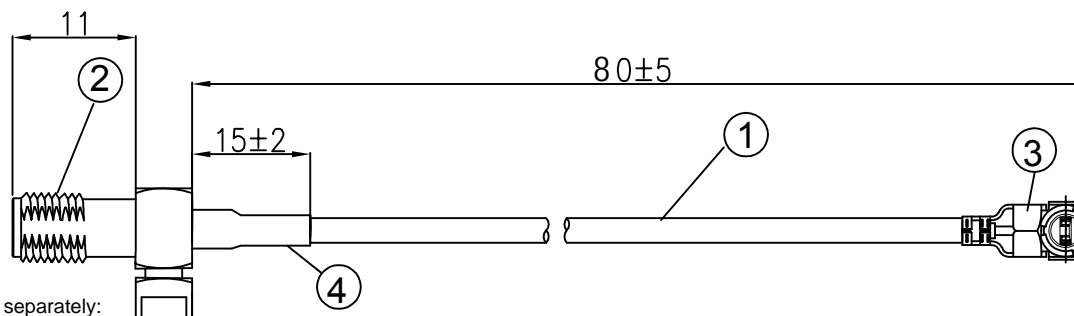


Three accessories are included and shipped separately:
gasket, washer, and nut.

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeve	Black heat shrink tubing, OD: 2.0mm	AS
③	Terminal	High-quality I-PEX compatible 1.13 terminal, gold-plated	1
②	Connector	SMA female connector with female pin, 4-leg design, 11 threads, gold-plated	1
①	Coaxial cable	RF1.13 black coaxial cable, OD: 1.13mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.				www.kinghelm.net	
KH-IPEXA-SMAKWE-B080H					
ALL DIMENSION ARE IN MM	DRAWN	James	DATE	I-PEX 1.13 TO SMA /F L=80mm	
			2021-10-30		
COMPUTER GENERATED IN SOLIDWORKS	CHKD.	Frank	2021-10-30		
	APPD.	Scott	2021-10-30		
DO NOT SCALE THIS DRAWING					
PROJECTION	GENERAL TOLERANCE FOR ANGLES		SIZE	Number	REV
	X.X X.XX ± 1° ± 0.3 0.25 0.150		B	X.XXX	A
			SCALE: Free TYPE		SHEET 1