


Kinghelm®

| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |
| | | | | | |

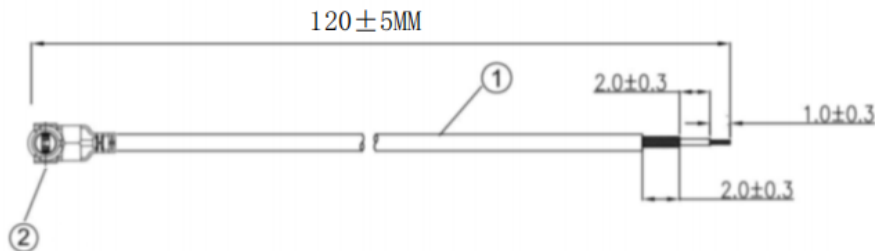

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|---------------|--------------------------------------|------|
| | INTERFACE | First-generation IPEX terminal | 1 |
| | COAXIAL CABLE | RG1.13 CABLE,COLOR: WHITE,OD: 1.13mm | AS |

Shenzhen Kinghelm Electronics Co., Ltd.

www.kinghelm.net

KH-IPEX-221-RG1.13-WH120

ALL DIMENSION
ARE IN MM

DRAWN James

DATE 2020-6-15

ENG.

COMPUTER GENERATED
IN SOLIDWORKS


MFG.

DO NOT SCALE
THIS DRAWING

QA.

First-generation IPEX to Open-ended
RG1.13 White Adapter Cable

PROJECTION



GENERAL TOLERANCE FOR
ANGLES X.X X.XX X.XXX
±1° ±0.3 ±0.25 ±0.150

SIZE
B

Number

REV
A

SCALE:Free

TYPE

SHEET 1 OF 1

CUSTOMER P/N: