


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

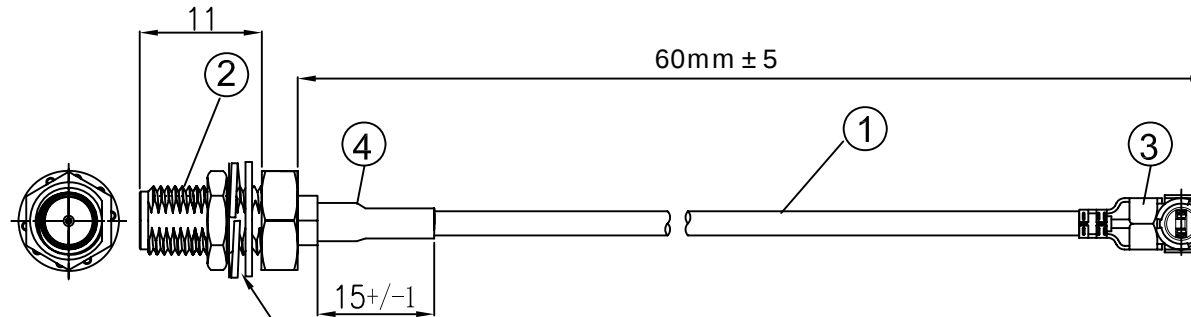

Three accessories are provided separately with the shipment
(2 washers and 1 nut).

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. MECHANICALL:
 - 3.1. SMA PULL FORCE: 12.0KGS.
4. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeve	Black heat shrink tube, OD: 2.0mm	AS
③	Terminal	High imitation I-PEX, 1.37 terminal, gold-plated	1
②	Connector	SMA female inner pin, split type, 11 threads, gold-plated	1
①	Coaxial Cable	RF 1.37 black cable, OD: 1.37mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

www.kinghelm.net

KH-IPEX-SMA-RG137-60MM

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2018 /05 /04	TITLE RF CABLE I-PEX 1.37 TO SMA /F L=60 MM	
	ENG.			
	MFG.			
	Q.A.			
COMPUTER GENERATED IN SOLIDWORKS			SIZE B	Number
DO NOT SCALE THIS DRAWING			REV A	
PROJECTION 	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		SCALE: Free	TYPE
CUSTOMER P/N:		SHEET 1 OF 1		