


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

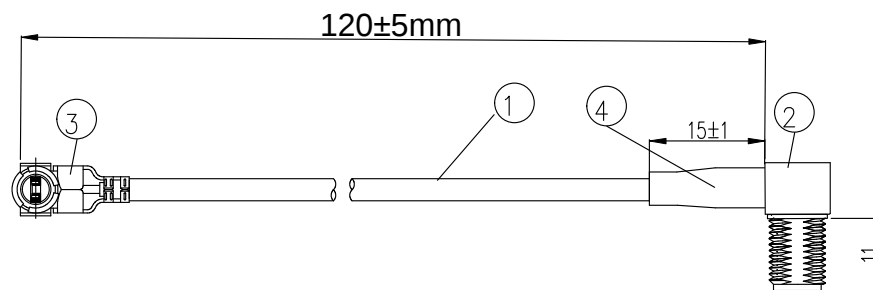

NOTES:


1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 100V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 20M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeving	Black heat shrink tubing, 2.5 × 15 mm	AS
③	Connector	IPEX 1.13 domestic terminal	1
②	Connector	SMA female, right-angle, female pin, 11 threads, gold-plated	1
①	Coaxial Cable	RF1.13 black cable, OD: 1.10 mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

Model: KH-IPEX-SMA-W-120

www.kinghelm.net

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2019 /03 /01	I-pex1.13-to sma/f L=120MM			
	ENG.					
COMPUTER GENERATED IN SOLIDWORKS	MFG.					
DO NOT SCALE THIS DRAWING	Q.A.					
PROJECTION 	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		SIZE B	Number		REV A
SCALE: Free			TYPE	SHEET 1 OF 1		