


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

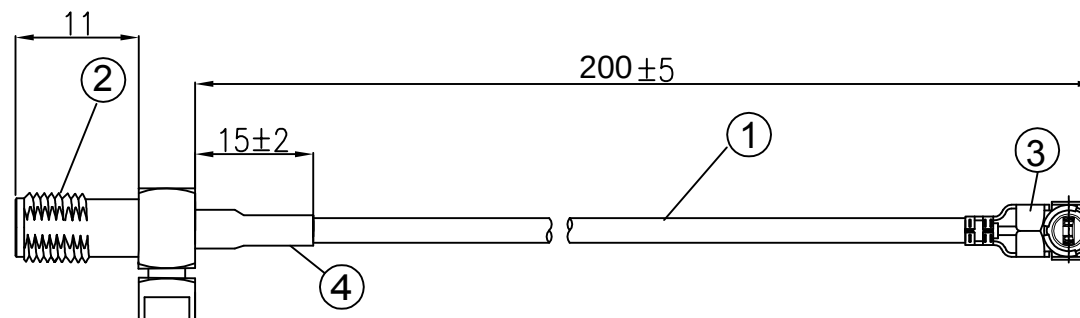

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeving	Black Heat Shrink Tubing, OD: 2.0mm	AS
③	Terminal	High Imitation I-PEX, 1.37 Terminal, Gold-Plated	1
②	Connector	SMA Female Connector with Female Pin, 4 Legs, Half Thread, Gold-Plated	1
①	Coaxial Cable	RF 1.37 Black Cable, OD: 1.37mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.	www.kinghelm.net
KH-IPEX-SMAKWE-RG137-B200MM	

ALL DIMENSION ARE IN MM	DRAWN James	DATE 2021-10-30	I-PEX 1.37 TO SMA / F L=200mm
	CHKD. Frank	2021-10-30	
	APPD. Scott	2021-10-30	
COMPUTER GENERATED IN SOLIDWORKS			
DO NOT SCALE THIS DRAWING			
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX ± 1° ± 0.3 0.25 0.150		
	SIZE Number	REV A	
	B X.XXX		
	SCALE: Free	TYPE	SHEET 1 OF 1

CUSTOMER P/N: