


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

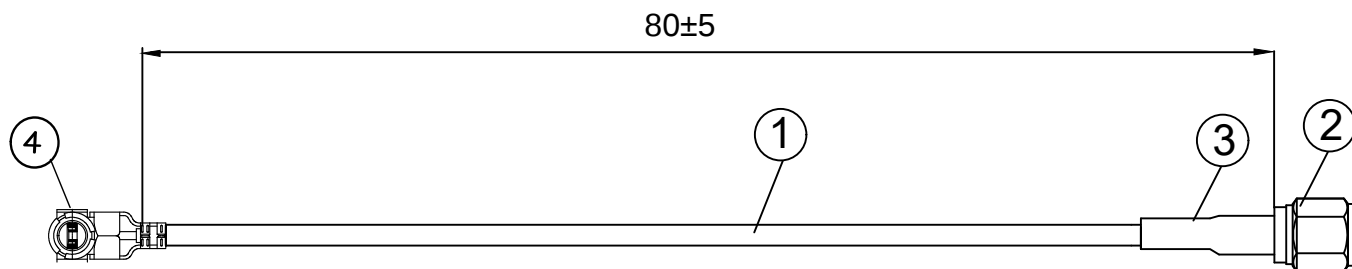

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DC 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

- 2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Connector	Domestic IPEX First-Generation Terminal	
③	Sleeve	Sleeve with OD: 2.5 × 15 mm	1
②	Connector	SMA Male Straight Connector, Male Pin, Gold-Plated	1
①	Coaxial Cable	RG1.78 Black Coaxial Cable, OD: 1.78 mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

ALL DIMENSION ARE IN MM	DRI	DATE	www.kinghelm.net	
	DRAIN. Jamy	2023/8/11	KH-SMAJ-IPEX-RG1.78-80	
COMPUTER GENERATED IN SOLIDWORKS	CHK. Alan	2023/8/11		
DO NOT SCALE THIS DRAWING	APP. Ellis	2023/8/11	kinghelm666@kinghelm.net	
PROJECTION 	GENERAL TOLERANCE FOR ANGLES XX X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		SCALE: Free	SHEET 1 OF 1