


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

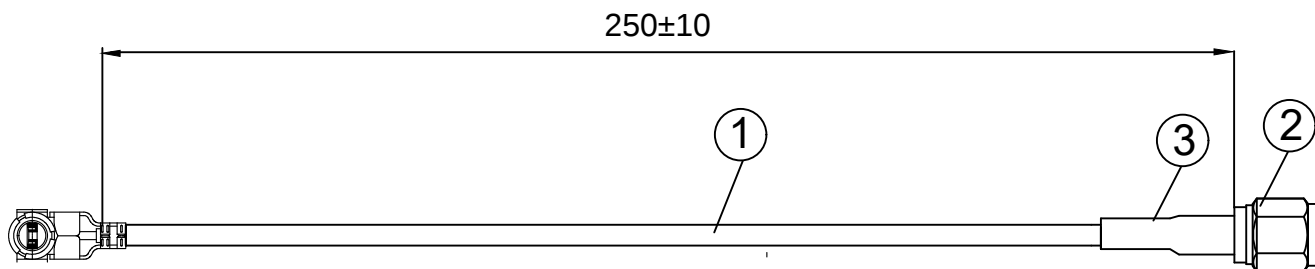


NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DC 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
- ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Connector	Domestic IPEX Gen 4 1.37mm Terminal	
③	Sleeve	2.5 × 15 mm Sleeve	1
②	Connector	SMA Male Straight Connector, Male Pin, Gold-Plated	1
①	Coaxial Cable	RG1.37 Black Coaxial Cable, OD: 1.37mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

ALL DIMENSION ARE IN MM	DRI	DATE	KH-SMAJ-IPEX4-RG1.37-B250		
	DRAIN. Jamy	2023/8/11			
COMPUTER GENERATED IN SOLIDWORKS	CHK. Alan	2023/8/11			
DO NOT SCALE THIS DRAWING	APP. Ellis	2023/8/11			
PROJECTION 	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		www.kinghelm.net		
			SCALE: Free	TYPE	SHEET 1 OF 1

KH-SMAJ-IPEX4-RG1.37-B250

www.kinghelm.net