


Kinghelm®

REVISIONS

REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN	James		9/26

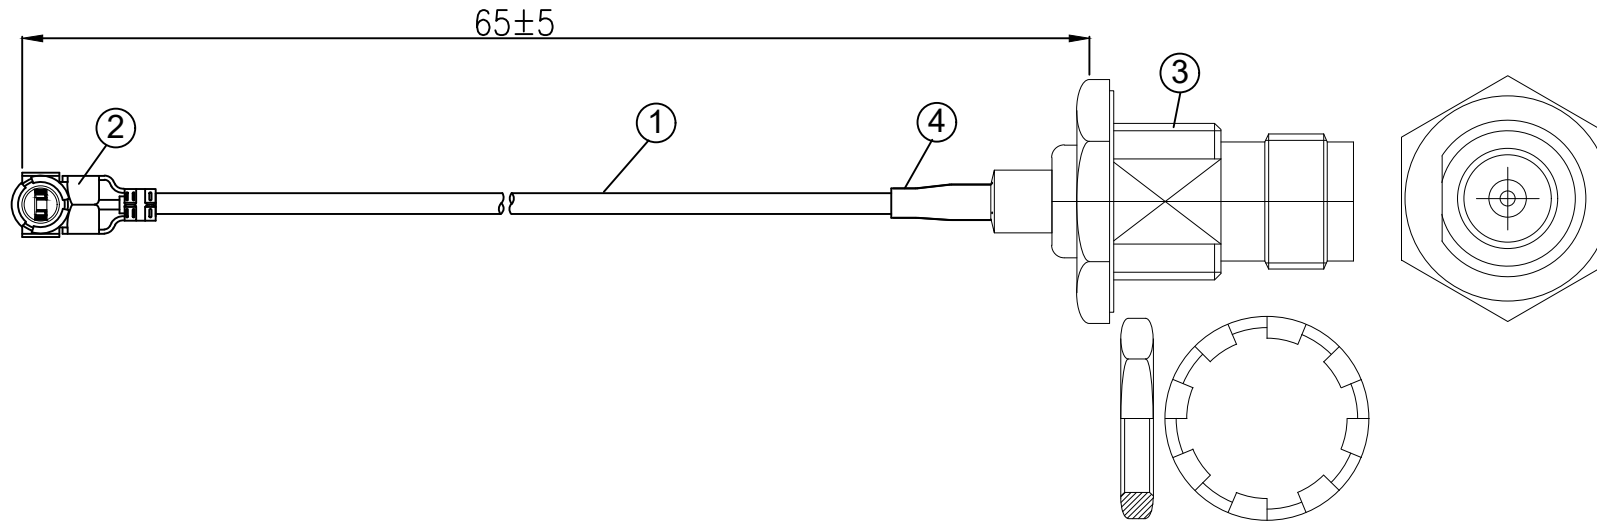

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

- 2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Sleeve	OD: 2.5×15 mm Black Heat Shrink Tube	1
③	Connector	TNC Female Connector, Female Pin, Straight Type,Nickel-Plated	1
②	Terminal	High Imitation I-PEX, 1.13 Terminal, Gold-Plated	1
①	Coaxial Cable	RG-1.13 Black Cable, OD: 1.10 mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

www.kinghelm.net

ALL DIMENSION ARE IN MM	DRAWN James	DATE 2023-3-1	Model: KH-TNC-113IPEX-65 TITLE
	CHKD. Frank	2023-3-1	
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING	APPD. Scott	2023-3-1	
PROJECTION 	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ±1° ±0.3 ±0.25 ±0.150		Model: KH-TNC-113IPEX-65 TITLE RG1.13 CABLE IPEX TO TNC/F, L=65MM
CUSTOMER P/N:		SIZE B	DWG Number.
		SCALE:Free	TYPE
		SHEET 1 OF 1	

REV
A