

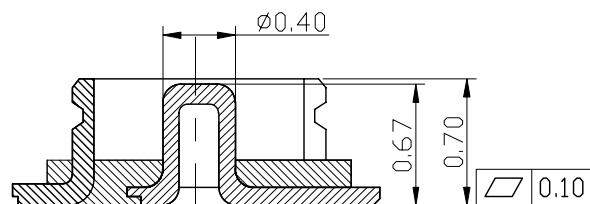
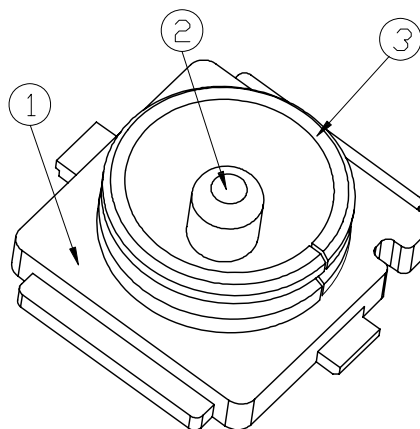
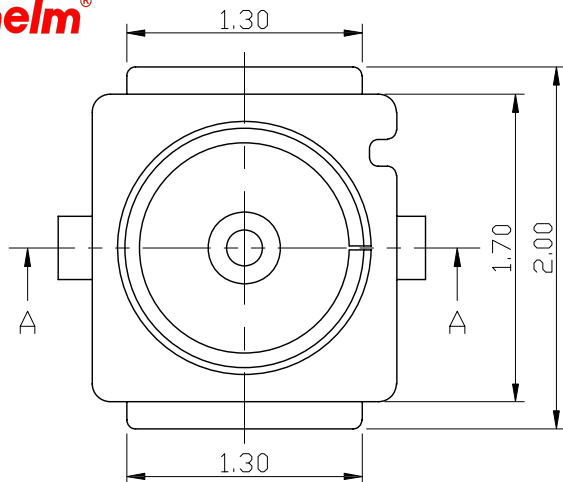


Kinghelm®

REV	ECN NO.	APPD
A	ECN1211001	MAX

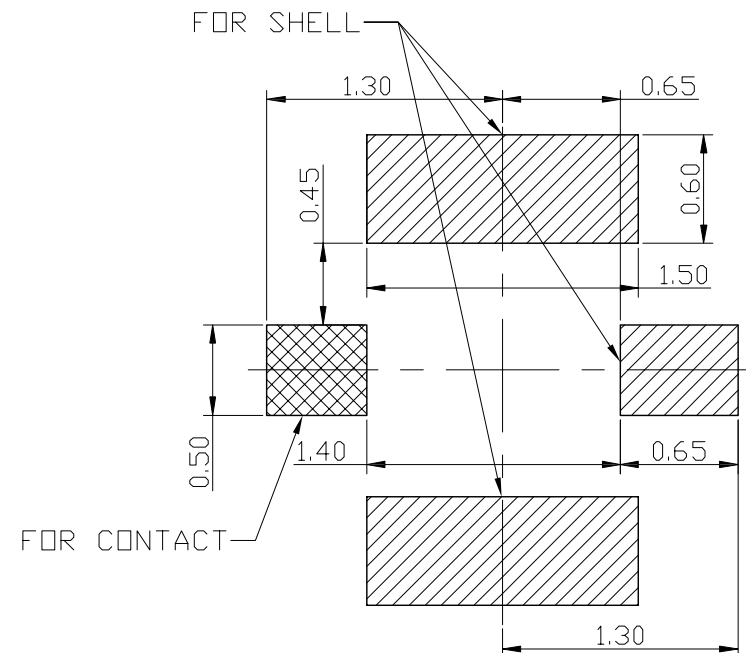

Section: A-A

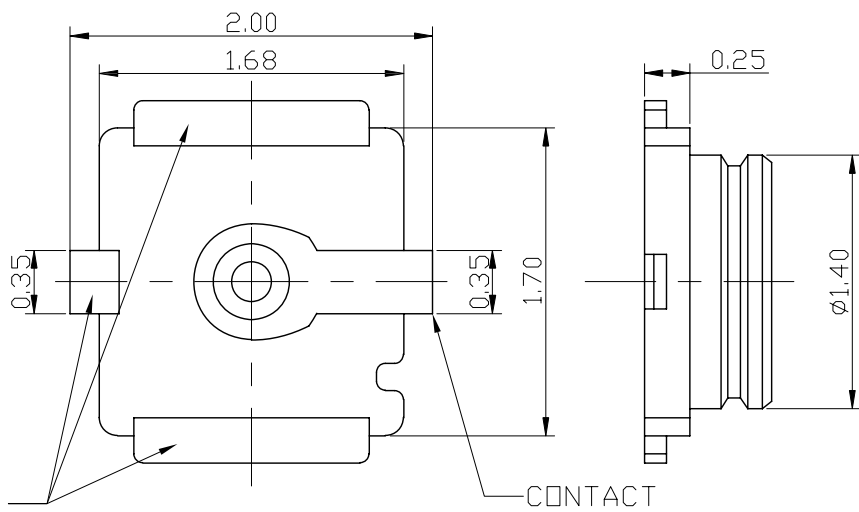

 Contact Pad  Shell Pad

P.C.B Layout

NOTE: UNLESS OTHERWISE SPECIFIED

1. DIMENSION SHALL BE INTERPRETED PER ANSI Y14.5M-1994.
2. DIMENSION MARKED WITH '▼' SHOULD SPECIFIED ON INSPECTION PLAN.
3. CONTACT RETENTION FORCE: 0.2 N MIN.
4. CONTACT MATERIAL: COPPER ALLOY.
5. INSULATOR: HIGH TEMPERATURE PLASTIC UL94 V-0.
6. LOW PROFILE: 1.5MM MAX. MATING HEIGHT.
7. APPLICATION FREQUENCY UP TO 6 G HZ.

3	SHELL	1	COPPER ALLOY	Ni: 50u"~100u"/Tin Plating	
2	CONTACT	1	COPPER ALLOY	Ni: 50u"~100u"/Gold Flash	
1	HOUSING	1	LCP(BLACK)	UL94V-0	
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARK

**Shenzhen Kinghelm
Electronics Co., Ltd.**

KH-IPEX3-2020
www.kinghelm.net

.X± 0.25	.X± 5'	APPD: Max 11/2'12					
.XX± 0.25	.XX± 3'	CHKD: Max 11/2'12		UNITS	SCALE	SHEET	REV.
.XXX±	.XXX± 1'	DR: Andy 11/2'12		mm	1:1	1/1	A