


Kinghelm®

| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |
| | | | | | |

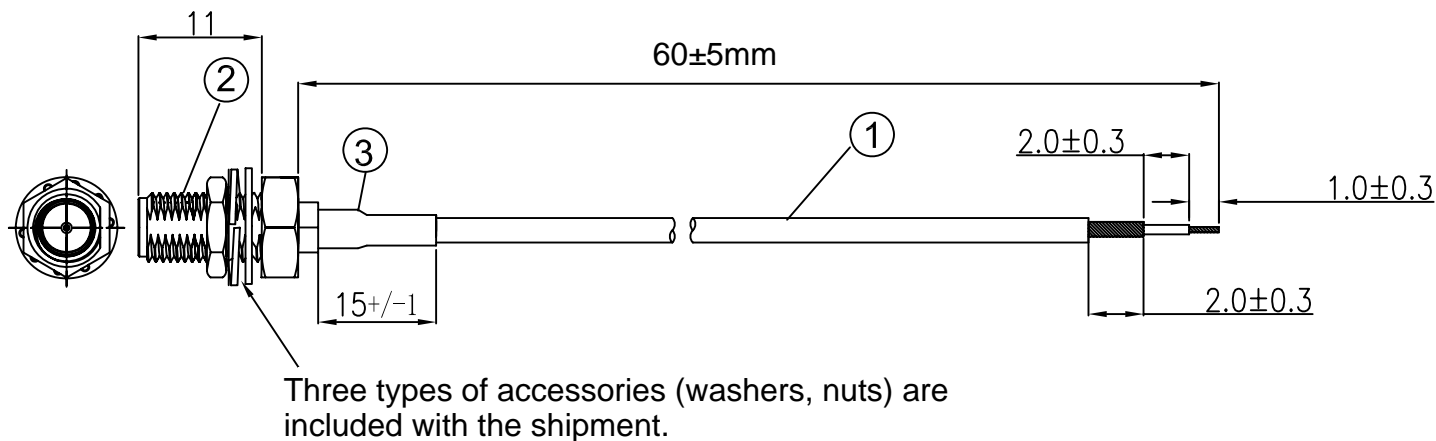

NOTES:

1.ELECTRICAL:

1.1.VOLTAGE RATING:DCV 300V 10MS

1.2.CONDUCTANCE RESISTANCE:3.0 OHM/MAX.

13.INSULATION RESISTANCE:5.0M OHM/MIN.

1.4.THE CABLE SHOULD BE 100% ELECTRICAL TEST

1.5.IT SHOULD BE NO ANY OPEN/SHORT,MISWIRING
AND INTERMITTENT FAILURES.

2.MATERIAL:

2.1.SEE TABLE

3.ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|---------------|--|------|
| ③ | Ferrule | Black Heat Shrink Tubing, OD: 2.0mm | AS |
| ② | Connector | SMA Female Jack with Female Contact Pin, Two-Piece, 11-Thread, Gold-Plated | 1 |
| ① | Coaxial Cable | RF 178 Brown Cable, OD: 1.8mm | AS |

Shenzhen Kinghelm Electronics Co., Ltd

www.kinghelm.net

KH-122-178SMA-60

ALL DIMENSION
ARE IN MM

DRAWN Jamy

DATE 2020-06-15


ENG.

MFG.

Q.A.

COMPUTER GENERATED
IN SOLIDWORKS

DO NOT SCALE
THIS DRAWING



GENERAL TOLERANCE FOR
ANGLES X.X X.XX X.XXX
± 1° ± 0.3 ± 0.25 ± 0.150

SMA /F TO OPEN L=60 mm

SIZE Number

REV

B

A

SCALE: Free

TYPE

SHEET 1 OF 1

CUSTOMER P/N: