


Kinghelm®

| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |
| | | | | | |

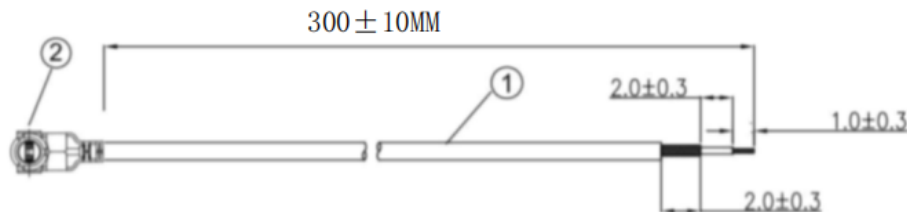

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|---------------|-------------------------------------|------|
| | INTERFACE | Third-generation IPEX terminal | 1 |
| | COAXIAL CABLE | RG0.81 CABLE,COLOR: BLUE,OD: 0.81mm | AS |

Shenzhen Kinghelm Electronics Co., Ltd.

www.kinghelm.net

KH-IPEX3-221-RG0.81-BU300

| | | |
|-------------------------------------|-------------|----------------|
| ALL DIMENSION ARE IN MM | DRAWN James | DATE 2020-6-15 |
| | ENG. | |
| COMPUTER GENERATED IN SOLIDWORKS | MFG. | |
| | QA. | |
| DO NOT SCALE THIS DRAWING | | |

Third-generation IPEX to Open-ended RG0.81 Blue Adapter Cable



GENERAL TOLERANCE FOR
ANGLES X.X X.XX X.XXX
±1° ±0.3 ±0.25 ±0.150

| SIZE | Number | REV |
|------------|--------|--------------|
| B | | A |
| SCALE:Free | | TYPE |
| | | SHEET 1 OF 1 |

CUSTOMER P/N: