


**Kinghelm®**

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

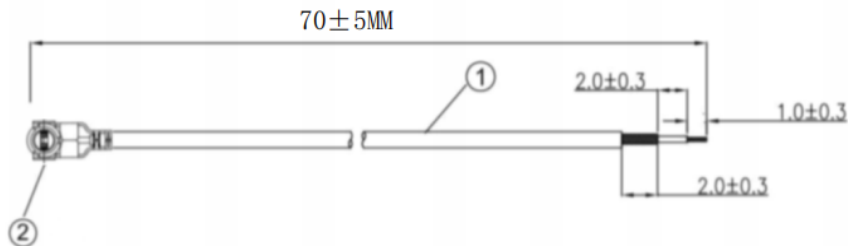

**NOTES:**

**1. ELECTRICAL:**

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

**2. MATERIAL:**

2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
	INTERFACE	Third-generation IPEX terminal	1
	COAXIAL CABLE	RG0.81 CABLE,COLOR: WHITE,OD: 0.81mm	AS
Shenzhen Kinghelm Electronics Co., Ltd.		www.kinghelm.net	
KH-IPEX3-221-RG0.81-WH70			
ALL DIMENSION ARE IN MM  COMPUTER GENERATED IN SOLIDWORKS  DO NOT SCALE THIS DRAWING	DRAWN Jamy	DATE 2020-6-15	Third-generation IPEX to Open-ended RG0.81 White Adapter Cable
	ENG.		
	MFG.		
	QA.		
PROJECTION 	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ±1° ±0.3 ±0.25 ±0.150		REV A
CUSTOMER P/N:		SCALE:Free	SHEET 1 OF 1