


**Kinghelm®**

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

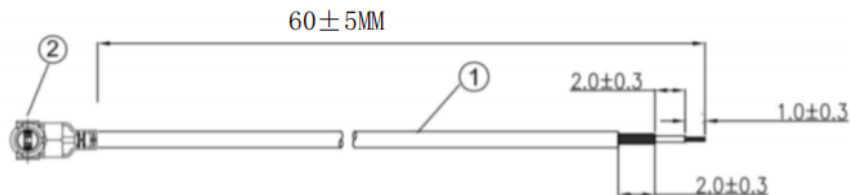

**NOTES:**

**1. ELECTRICAL:**

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

**2. MATERIAL:**

2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
	INTERFACE	Fourth-generation IPEX terminal	1
	COAXIAL CABLE	RG0.81 CABLE,COLOR: Red,OD: 0.81mm	AS

**Shenzhen Kinghelm Electronics Co., Ltd.**

**www.kinghelm.net**

**KH-IPEX4-221-RG0.81-R60**

ALL DIMENSION  
ARE IN MM

DRAWN  
Jamy

DATE  
2020-6-15

ENG.

COMPUTER GENERATED  
IN SOLIDWORKS

MFG.

DO NOT SCALE  
THIS DRAWING

QA.

Fourth-Generation IPEX to Open RG0.81 Red Adapter Cable



PROJECTION

GENERAL TOLERANCE FOR  
ANGLES X.X X.XX X.XXX  
 $\pm 1^\circ$   $\pm 0.3$   $\pm 0.25$   $\pm 0.150$

SIZE Number

**B**

REV

**A**

SCALE:Free

TYPE

SHEET 1 OF 1

CUSTOMER P/N: