


**Kinghelm®**

| REVISIONS |        |             |     |     |      |
|-----------|--------|-------------|-----|-----|------|
| REV       | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A         |        | DESIGN      |     |     |      |
|           |        |             |     |     |      |

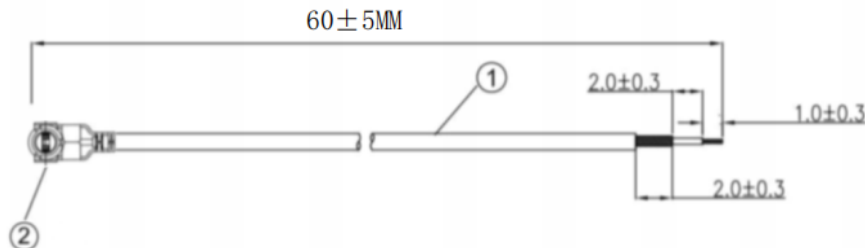

**NOTES:**

**1. ELECTRICAL:**

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

**2. MATERIAL:**

- 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

| ITEM NO. | PART NUMBER   | DESCRIPTION                          | QTY. |
|----------|---------------|--------------------------------------|------|
|          | INTERFACE     | Fourth-generation IPEX terminal      | 1    |
|          | COAXIAL CABLE | RG0.81 CABLE,COLOR: White,OD: 0.81mm | AS   |

**Shenzhen Kinghelm Electronics Co., Ltd.**

**www.kinghelm.net**

**KH-IPEX4-221-RG0.81-WH60**

ALL DIMENSION  
ARE IN MM

DRAWN  
Jamy

DATE  
2020-6-15

ENG.

COMPUTER GENERATED  
IN SOLIDWORKS


MFG.

DO NOT SCALE  
THIS DRAWING

QA.

Fourth-Generation IPEX to Open RG0.81 White Adapter Cable

PROJECTION



GENERAL TOLERANCE FOR  
ANGLES X.X X.XX X.XXX  
±1° ±0.3 ±0.25 ±0.150

SIZE Number

**B**

REV

**A**

SCALE:Free

TYPE

SHEET 1 OF 1

CUSTOMER P/N: