


**Kinghelm®**

| REV    |             | REVISIONS |  |  | DWN | CHK | DATE |
|--------|-------------|-----------|--|--|-----|-----|------|
| NUMBER | DESCRIPTION |           |  |  |     |     |      |
| A      | DESIGN      |           |  |  |     |     |      |
|        |             |           |  |  |     |     |      |

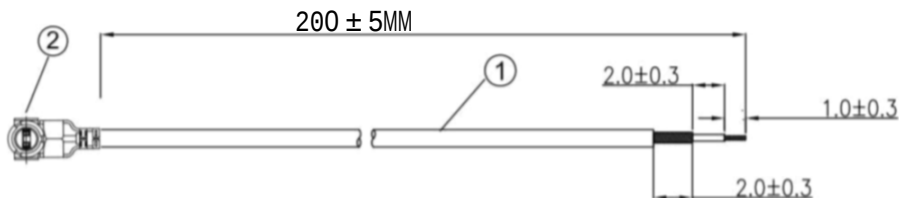

## NOTES:

### 1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

### 2. MATERIAL:

- 2.1. SEE TABLE

### 3. ALL COMPONENTS ARE RoHS COMPLIANT.

| NO. | PART.         | DESCRIPTION                          | QTY. |
|-----|---------------|--------------------------------------|------|
|     |               |                                      | AS   |
| ②   | CONNECTOR     | 4 Generation IPEX Connector          | 1    |
| ①   | COAXIAL CABLE | RF1.37 Black Coaxial Cable,OD:1.37mm | AS   |

**Shenzhen Kinghelm Electronics Co., Ltd**

**KHA-(RG1.37)-TX200-IPEX4-221**

[www.kinghelm.net](http://www.kinghelm.net)

ALL DIMENSION  
ARE IN MM

DRAWN Jamy

DATE 2020-06-15

ENG.


COMPUTER GENERATED  
IN SOLIDWORKS

MFG.

DO NOT SCALE  
THIS DRAWING

Q.A.

PROJECTION



GENERAL TOLERANCE FOR  
ANGLES X.X X.XX X.XXX  
± 1° ± 0.3 ± 0.25 ± 0.150

SIZE Number

**B**

REV

**A**

SCALE: Free

TYPE

SHEET 1 OF 1

CUSTOMER PIN: