
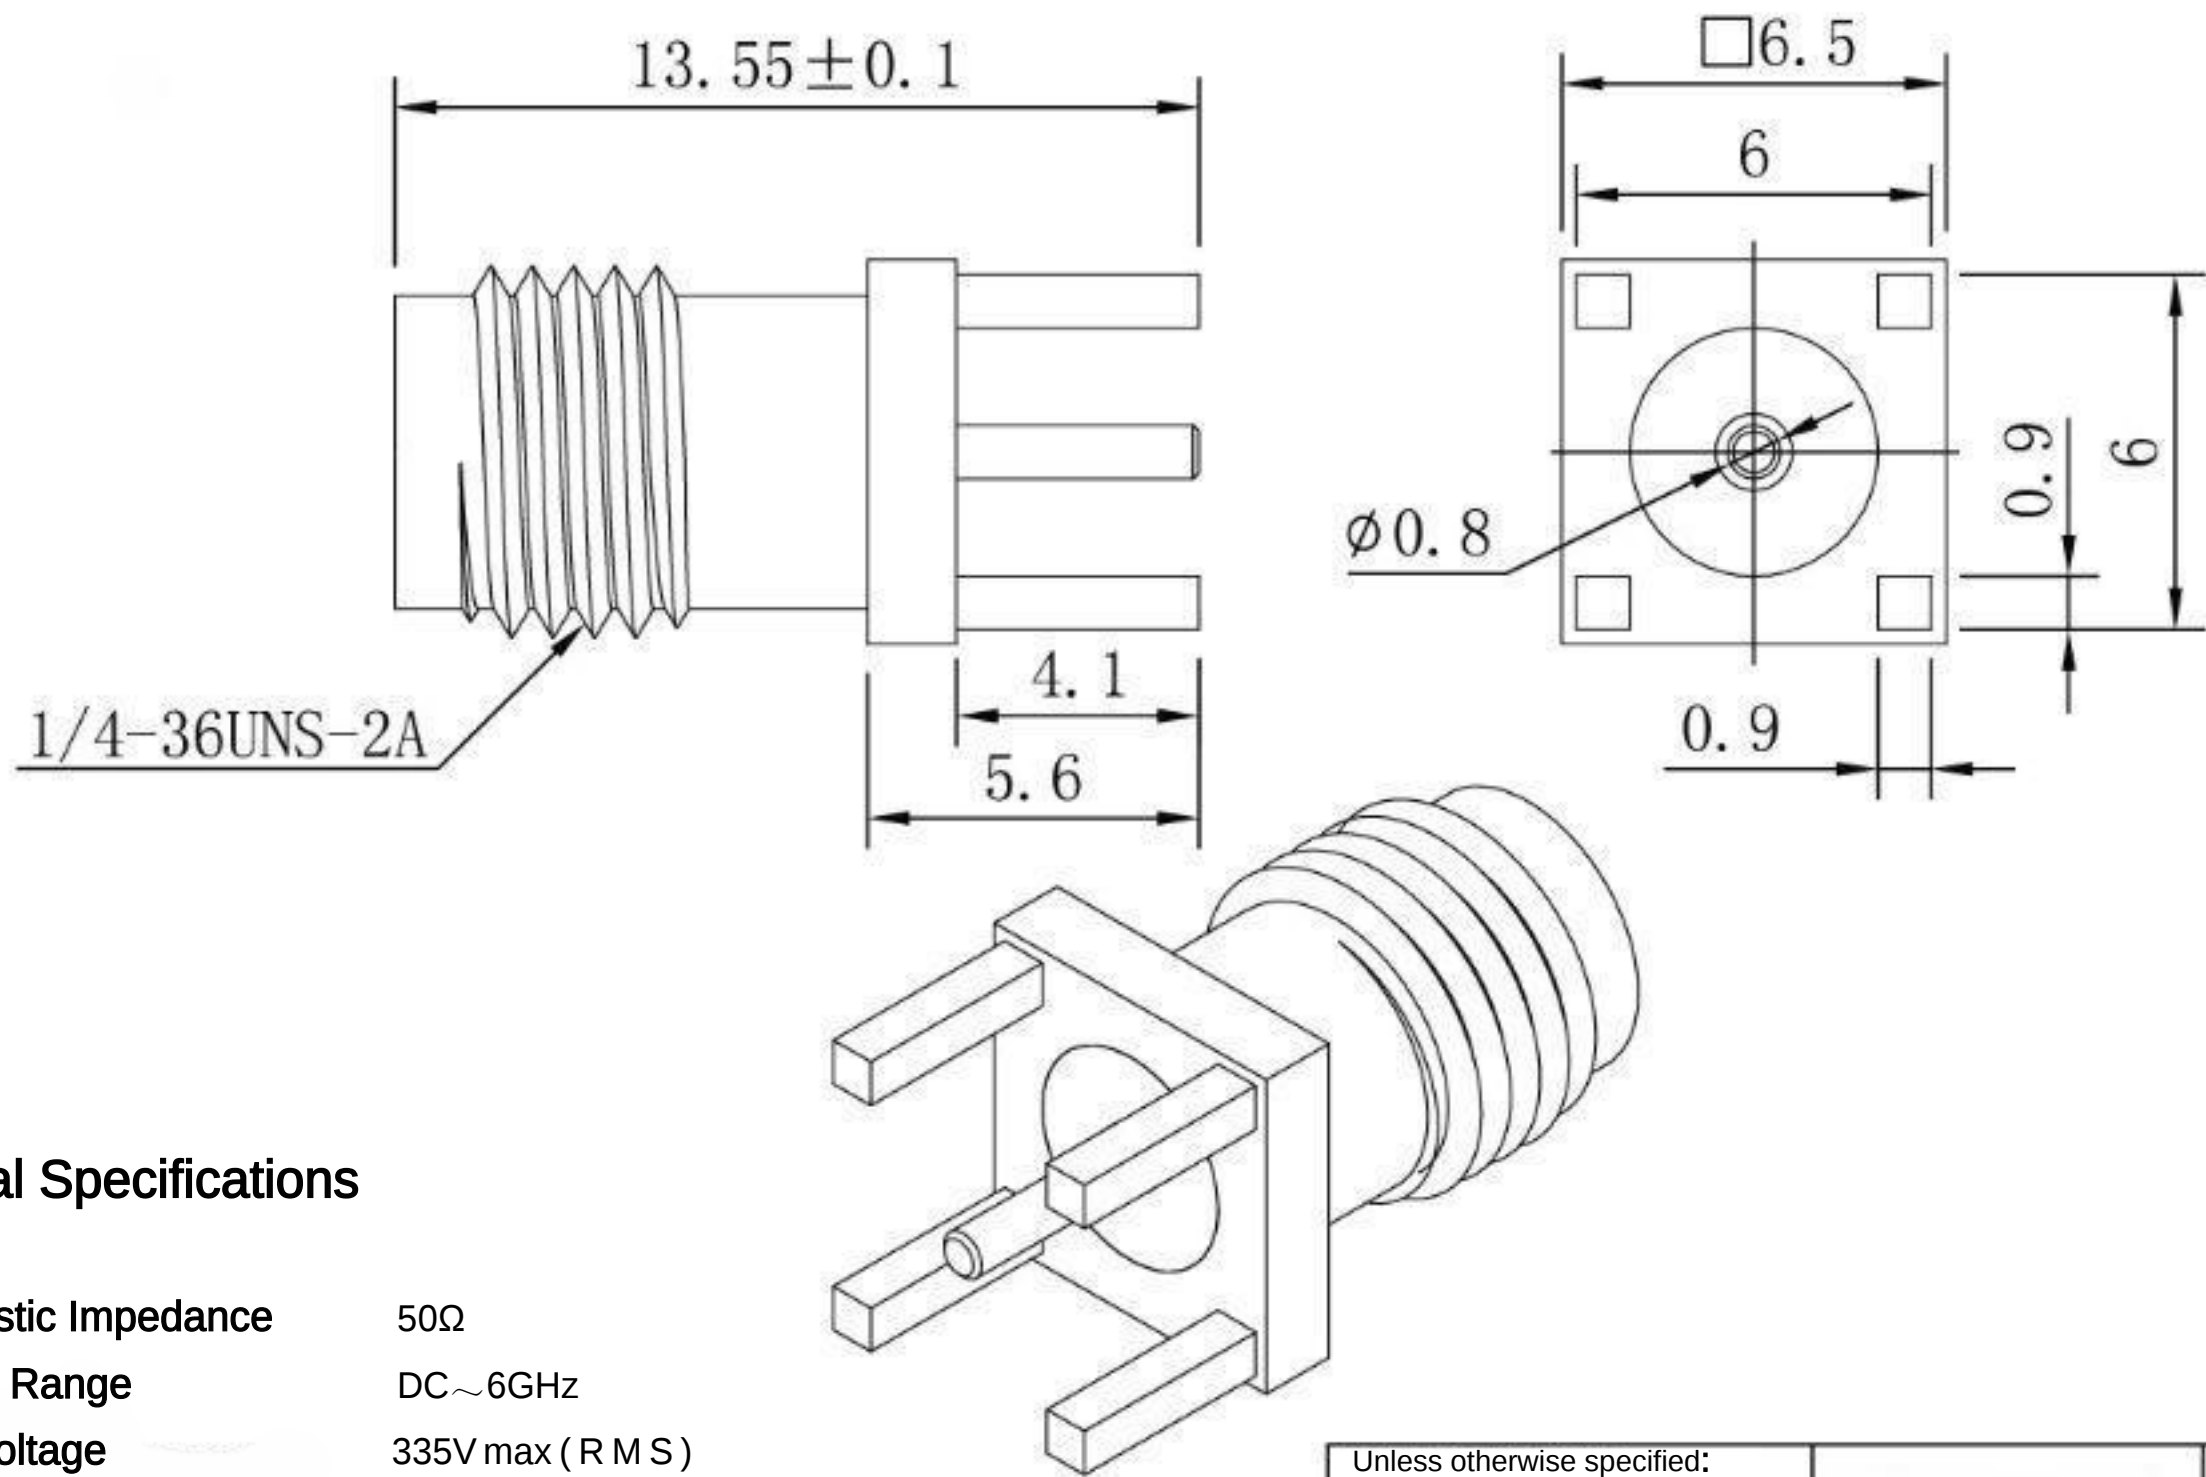




Technical Specifications

Characteristic Impedance	50Ω
Frequency Range	DC~6GHz
Working Voltage	335V max (R M S)
Insulation Resistance	≥ 1000 M Ω
Contact Resistance	Inner Conductor≤ 6 m Ω, Outer Conductor≤ 1 m Ω
Mechanical Durability	500 cycles
Withstand Voltage	500V rms (at sea level)

Unless otherwise specified: Dimensions are in millimeters(mm) Surface Treatment/Finishing : **** Tolerance : Linearity : ±0.05 Angle : ±*			KH-SMA-KE-Z48H										
							Shenzhen Kinghelm Electronics Co., Ltd.						
			www.kinghelm.net										
			Third Angle Projection										
	Name	Date							P/N				Revision
Design													
Audit													
Approval			Unit	mm	Ratio		weight			1 Sheet in total, Page 1		A	A4