


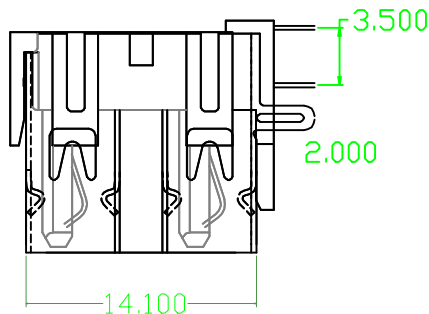


Kinghelm®

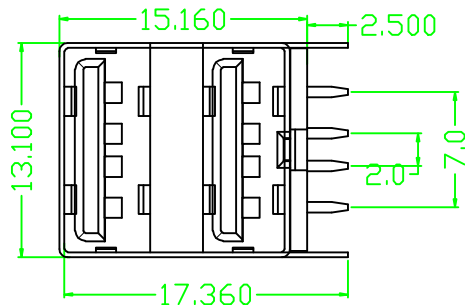

1.Material:

Contacts: Phosphor Bronze

Bronze

Insulator: PBT+30%

G.F.U.L 94V-0

Shell: SPCC

2.Mechanical:

Mating: 35N max.

Withdrawal Force: 10N min.

Durability: 1500 cycles min.

3.Electrical:

Current-max(amps) 1.5A

Voltage-max(volts) 30V

Withstanding Voltage 750V AC

Contact Resistance(ohms) 30

Milliohms max insulation.

Resistance(ohms) 1000 Megohms min.

4.Plating:

Contacts: Gold And Tin Over Nickel Plated.

Shell: Nickel over all plating.

5.Environmental:

Temperature Range: -55 to 85.

Shenzhen Kinghelm Electronics Co., Ltd.

www.kinghelm.net

KH-2AF90ZJ-13.5-BCu