


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

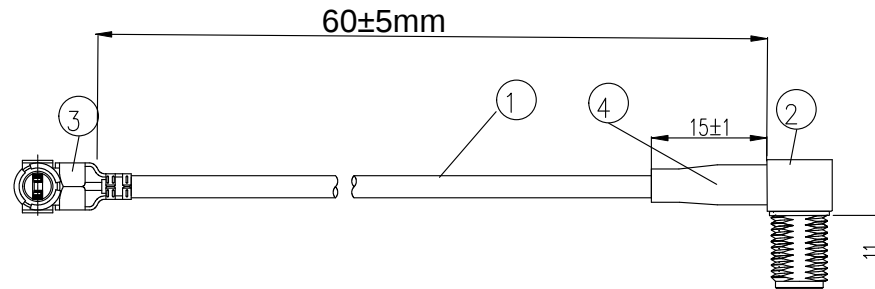

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING: DCV 100V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 20M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

- 2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Casing	Black heat-shrinkable sleeve, 3.5*15MM	AS
③	Connector	1rd Generation IPEX 1.37 Domestic Terminal	1
②	Connector	SMA Female Connector with Female Pin, Elbow Type, 11 Threads, Gold-Plated	1
①	Coaxial Cable	RF1.78 Brown Cable, OD: 1.8mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

KH-SMAKW-IPEX-RG1.78-60

www.kinghelm.net

ALL DIMENSION ARE IN MM	DRAWN	Jamy	DATE	2019 /03 /01
	ENG.			
	COMPUTER GENERATED IN SOLIDWORKS	MFG.		
	DO NOT SCALE THIS DRAWING	Q.A.		
PROJECTION		GENERAL TOLERANCE FOR ANGLES		
		X.X X.XX X.XXX		
		± 1° ± 0.3 ± 0.25 ± 0.150		
CUSTOMER P/N:		SIZE	Number	REV
		B		A
		SCALE: Free	TYPE	SHEET 1 OF 1