


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

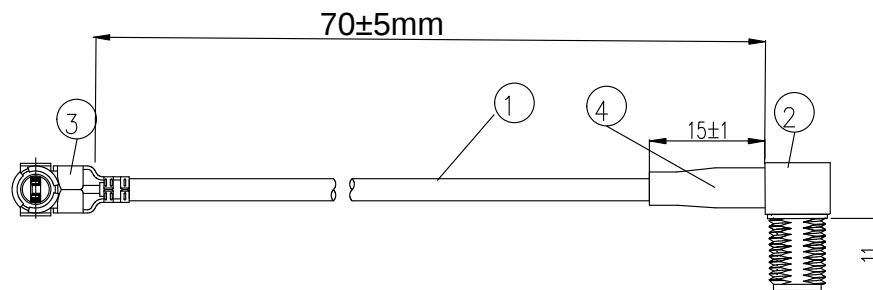

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING: DCV 100V 10MS
- 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
- 1.3. INSULATION RESISTANCE: 20M OHM/MIN.
- 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

2. MATERIAL:

- 2.1. SEE TABLE

3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Casing	Black heat-shrinkable sleeve, 2*15MM	AS
③	Connector	4rd Generation IPEX 1.13 Domestic Terminal	1
②	Connector	SMA Female Connector with Female Pin, Elbow Type, 11 Threads, Gold-Plated	1
①	Coaxial Cable	RF1.13 Black Cable, OD: 1.13mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

KH-SMAKW-IPEX4-RG1.13-B70

www.kinghelm.net

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2019 /03 /01			
	ENG.				
	COMPUTER GENERATED IN SOLIDWORKS				
	DO NOT SCALE THIS DRAWING				
PROJECTION		GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150		SIZE B	REV A
CUSTOMER P/N:		SCALE: Free		TYPE	SHEET 1 OF 1