


Technical Characteristics:

1. Operating Temperature: -25°C to 80°C
2. Rated Voltage: DC 30V
3. Rated Current: 1.0A
4. Contact Resistance: 30 milliohms (m)
5. Insulation Resistance: 100 megaohms (M)
6. Withstand Voltage: DC 500V
7. Insertion and Extraction Force: 5 to 35N
8. Lifespan: 1500 cycles
9. Salt Spray Resistance: 24 hours (24H)

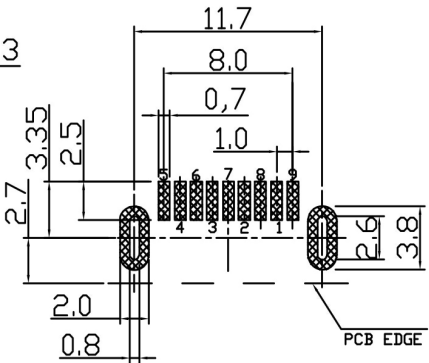

P-C-B


Borrowed (General)
Component Registration

Old Master Drawing Number

Master Drawing Number

Signature Date

Label	Revision Number	Change Document Number	Signature	Date
Design				
Review				
Process				
Standardization				
Approval				

C	2016080010-03	Signal Pin	H65 Copper T=0.2	Tin/Gold	
B	2016080010-02	Shell	Iron Shell T=0.3	Nickel Plated	
A	2016080010-01	Core	LCP	Blue	
Serial Number	Material Number	Name	Material	Plating/Color	Remarks
View Angle	<div><div><div>X. ± 0.30</div><div>Unspecified . X ± 0.20</div><div>Tolerance . XX ± 0.15</div><div>. XXX ± 0.05</div></div><div><div>X° . $\pm 2^{\circ}$</div><div>. X° $\pm 1^{\circ}$</div><div>. XX° $\pm 0.5^{\circ}$</div></div></div>		AM 3.0 USB Plug		
					
Drawing	Mark	Weight	Scale	2016080010	
Total of 1 page		Page 1			
Shenzhen Kinghelm Electronics Co., Ltd.				www.kinghelm.net	
KH-3.0USB-AM-9P					