


Single - strand hard wire 0.05-4.0mm² Multi - strand flexible wire 0.05-2.5mm²

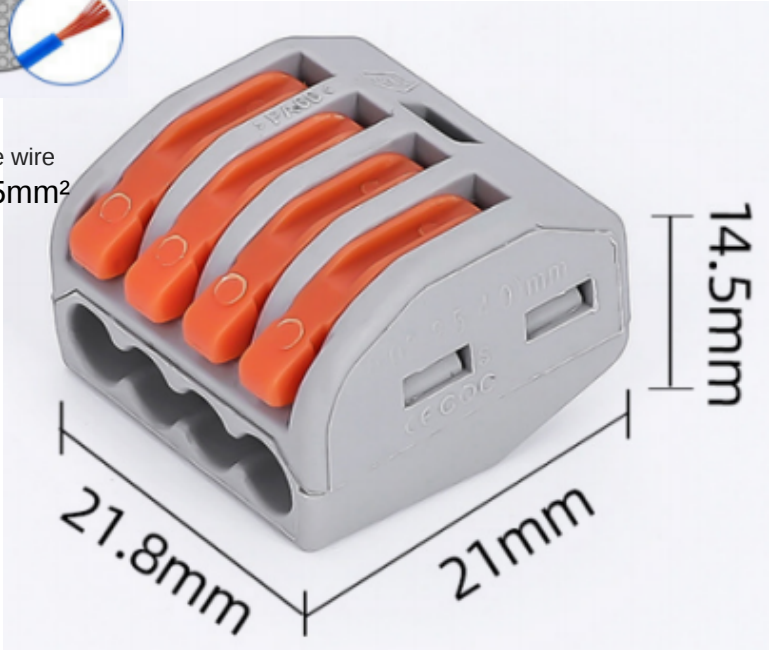

Specifications

Regulatory Certification:	CE
Material:	PCT
Contact:	Copper
Rating (Ampere/Voltage):	32A ;250V/600V
Wire Range (Cross Section):	0.08 - 4.0mm ² (Solid Hard Wire) 0.08 - 2.5mm ² (Flexible Cord)
Operating Temperature:	-40~105
Stripping Length:	10 - 12mm
Rated voltage:	250V/4KV
Rated current:	32V
Rated power:	7KW

Shenzhen Kinghelm Electronics Co., Ltd.		Tolerance		Name		Unit	mm		
KH-PCT-214	www.kinghelm.net	0,000	±0,05	KH-PCT-214		Proportion	1:1	Customization Date	2019-02-19
		0,00	±0,10						
		0,0	±			View			
		0,							
		ANGLE	±1°			REV	A0		