Kinghelm®

材质:阻燃PA

电流电压:32A/400V

接线范围:0.08-4.0mm²AWG:28-12

剥线长度：10mm

接线示意图

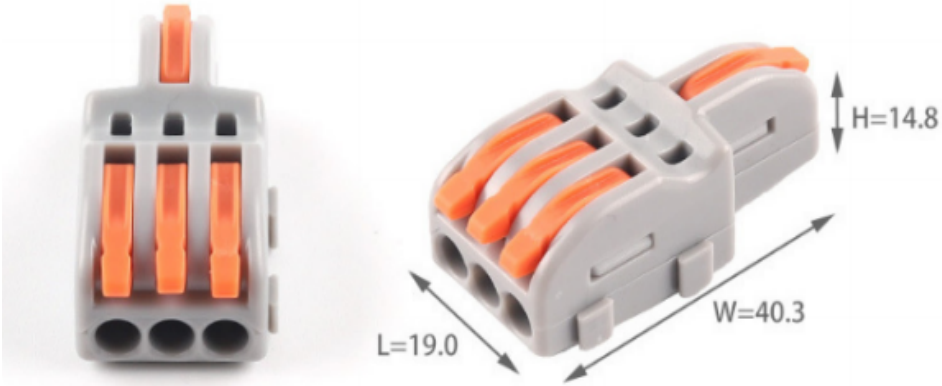

Technical Parameters

■**Applicable Wire Gauge:** 0.08 - 4.0mm²/28 - 11AWG (For Both Flexible and Hard Wires)

■Temperature Range: -40° to 110°

■**Rated Voltage:** 450V

■**Insulation Voltage:** 4kV

■**Rated Current:** 32A

■**Material:**

Shell: PA66/Polycarbonate PC
Connector: Red Copper
Spring Clip: 301 Stainless Steel

■**Comply With:** ROHS 2.0 Standard

■**Standard:** GB13140.1 - 2008

■**Stripping Length:** 10m （Note: The unit of "Stripping Length" here may be incorrect. Considering the previous context, it is generally 10mm. If it is actually 10mm, translate it as "10mm" ）

Shenzhen Kinghelm Electronics Co., Ltd.		Tolerance		Name	Unit	mm	
KH-KPCT-F13	www.kinghelm.net	0,000 0,00 0,0 0,	±0,05 ±0,10 ±	KH-KPCT-F13	Proportion	1:1	Customization Date 2019-02-19
		ANGLE	±1°		View		
					REV	A0	