


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN	James		9/26

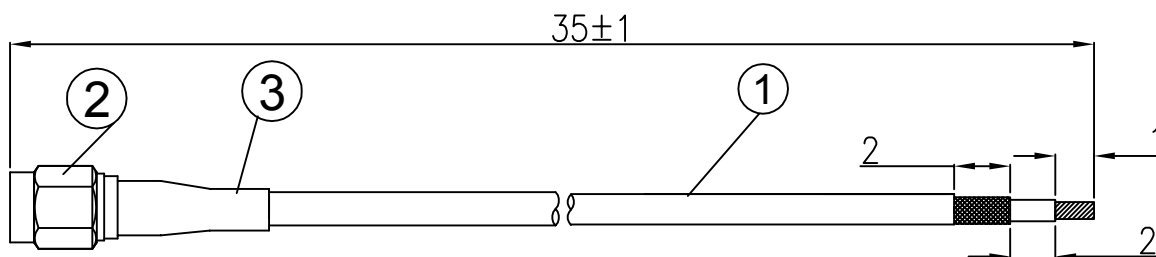

NOTES:

1.ELECTRICAL:

1.1.VOLTAGE RATING:DCV 300V 10MS

1.2CONDUCTANCE RESISTANCE:3.0 OHM/MAX.

1.3.INSULATION RESISTANCE:5.0M OHM/MIN.

1.4THE CABLE SHOULD BE 100%ELECTRICAL TEST

1.5IT SHOULD BE NO ANYOPEN/SHORT,MISWRING AND
INTERMITTENT FAILURES.

2.MATERIAL:

2.1.SEE TABLE

3.ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
③	Cable sleeve	Cable sleeve, OD: 2.5×15mm	1
②	Connector	SMA male plug with male pin, straight type, gold-plated	1
①	Coaxial cable	RF1.13 black coaxial cable, OD:1.10mm	AS

Shenzhen Kinghelm Electronics Co., Ltd

KHB(RG113)-35-28

www.kinghelm.net

ALL DIMENSION ARE IN MM	DRAWN James	DATE	TITLE RF1.13 CABLE SMA M TO OPEN, L=35MM
	CHKD. Frank	2021/07/06	
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING	APPD. Scott	2021/07/06	
			SIZE DWG Number.
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ±1° ±0.3 ±0.25 ±0.150		REV A
SCALE: Free		TYPE	SHEET 1 OF 1

CUSTOMER P/N: