


One input and three outputs

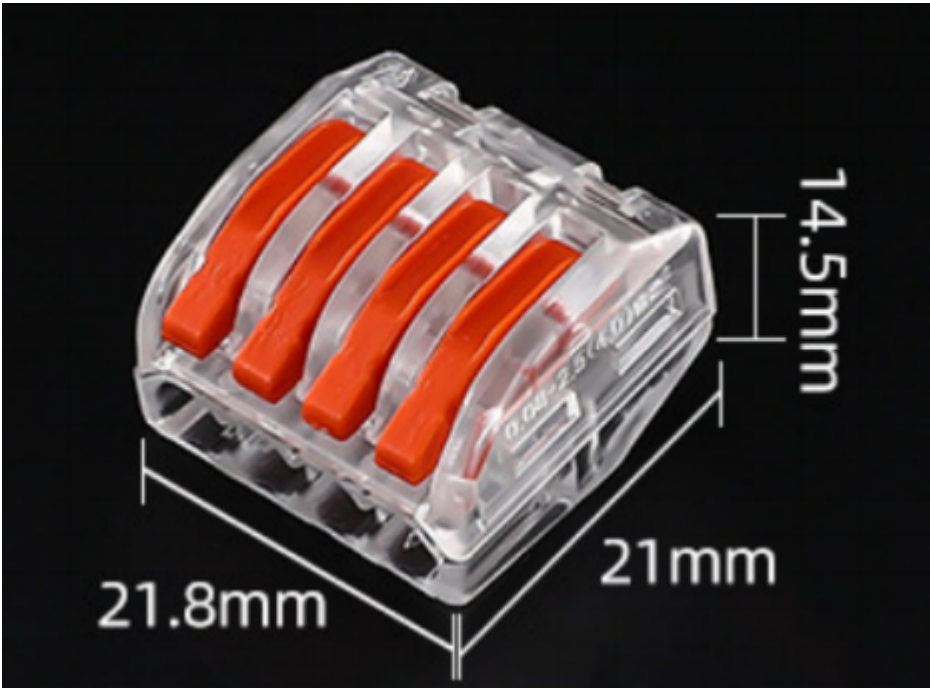

Housing Material: Flame-retardant PC

Spring Material: Stainless Steel

Stripping Length: 9 - 10mm

Contact Material: Red Copper

Rated Current: 32A

Operating Temperature: -20~105

Wiring Range

Hard wire: 0.08mm² - 4.0mm²;

Soft wire: 0.08mm² - 2.5mm²

Shenzhen Kinghelm Electronics Co., Ltd.		Tolerance		Name		Unit	mm		
KH-TPCT-214	www.kinghelm.net	0,000	±0,05	KH-TPCT-214		Proportion	1:1	Customization Date	2019-02-19
		0,00	±0,10						
		0,0	±			View			
		0,				REV	A0		
		ANGLE	±1°						