

8 - hole terminal

Universal for hard and soft wires

Flame - retardant Housing
Pure Copper Conductive Parts
Rated Current: 32A
Rated Voltage: 400V
Stripping Length: 10mm


Wiring Range



Solid hard wire
Stranded hard wire
0.08-4mm²



Stranded soft wire
0.08-4mm²

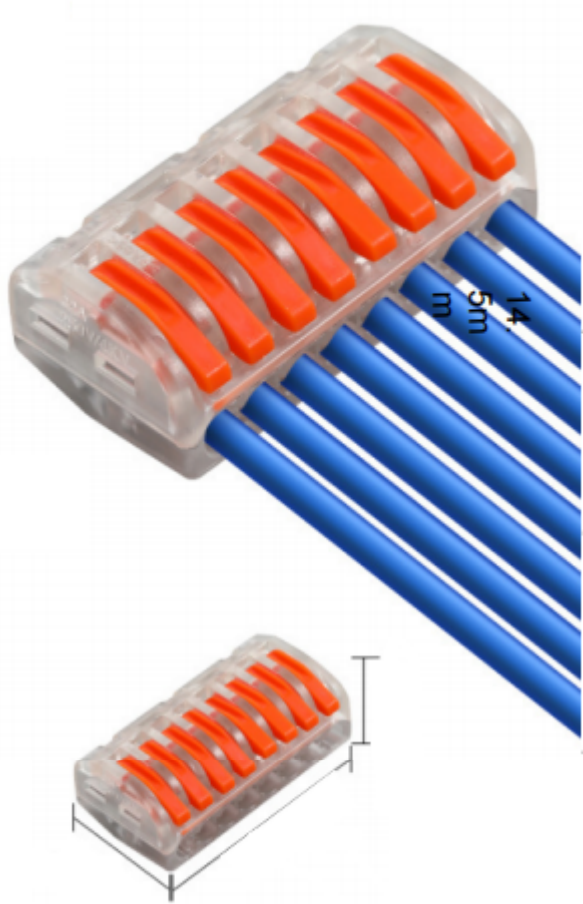

Housing Material: Flame-retardant PC
Spring Material: Stainless Steel
Stripping Length: 9 - 10mm
Contact Material: Red Copper
Rated Current: 32A
Operating Temperature: -20~105
Wiring Range
Hard wire: 0.08mm² - 4.0mm²;
Soft wire: 0.08mm² - 2.5mm²

Shenzhen Kinghelm Electronics Co., Ltd.		Tolerance		Name		Unit	mm		
KH-TPCT-218	www.kinghelm.net	0,000	±0,05	KH-TPCT-218		Proportion	1:1	Customization Date	2019-02-19
		0,00	±0,10			View			
		0,0	±						
		0,				REV	A0		
		ANGLE	±1°						