


Kinghelm®

REVISIONS

REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN	James		9/26

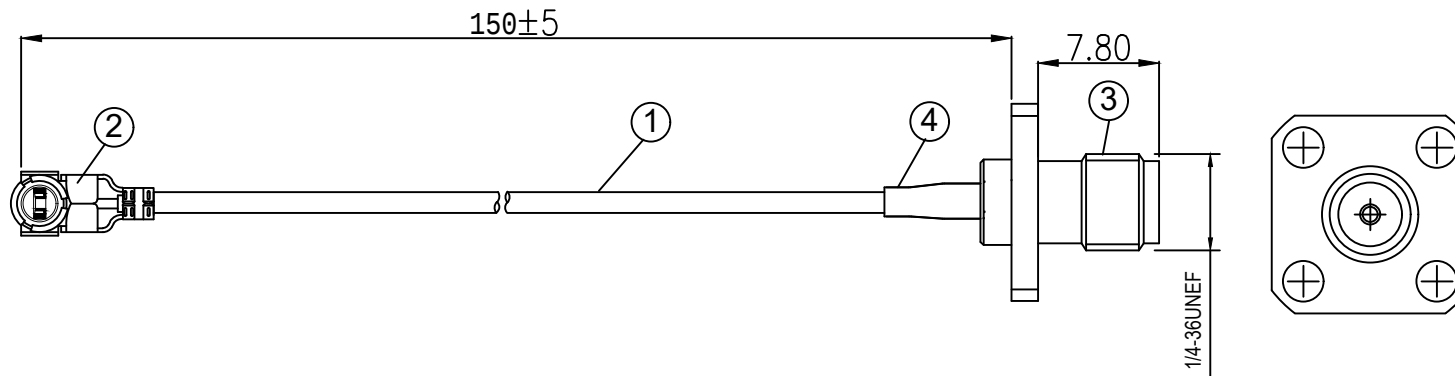

NOTES:

1.ELECTRICAL:

- 1.1.VOLTAGE RATING:DCV 300V10MS
- 1.2.CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
- 1.3.INSULATION RESISTANCE:5.0M OHM/MIN.
- 1.4.THE CABLE SHOULD BE 100% ELECTRICAL TEST
- 1.5.IT SHOULD BE NO ANY OPEN/SHORT,MISWIRING AND INTERMITTENT FAILURES.

2.MATERIAL:

2.1.SEE TABLE

3.ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Tube	OD:2.5×15mm black heat shrink tubing	1
③	Terminal	SMA female jack, female contact, 4-hole flange, gold-plated	1
②	Connector	I-PEX Gen 1 1.13 terminal, gold-plated	1
①	Coaxial Cable	RG-1.13 black cable, OD:1.10mm	AS

Shenzhen Kinghelm Electronics Co., Ltd

www.kinghelm.net

ALL DIMENSION ARE IN MM	DRAWN James	DATE 2023-3-1	TITLE KH-FLSMA-IPEX113-150 (Gold-plated 4-hole flange SMA to Gen 1 IPEX 1.13, black cable, length 150MM)
	CHKD. Frank	2023-3-1	
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING	APPD. Scott	2023-3-1	
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ±1° ±0.3 ±0.25 ±0.150		SIZE B
			DWG Number.
			REV A
			SCALE:Free
			TYPE
			SHEET 1 OF 1

CUSTOMER P/N: