
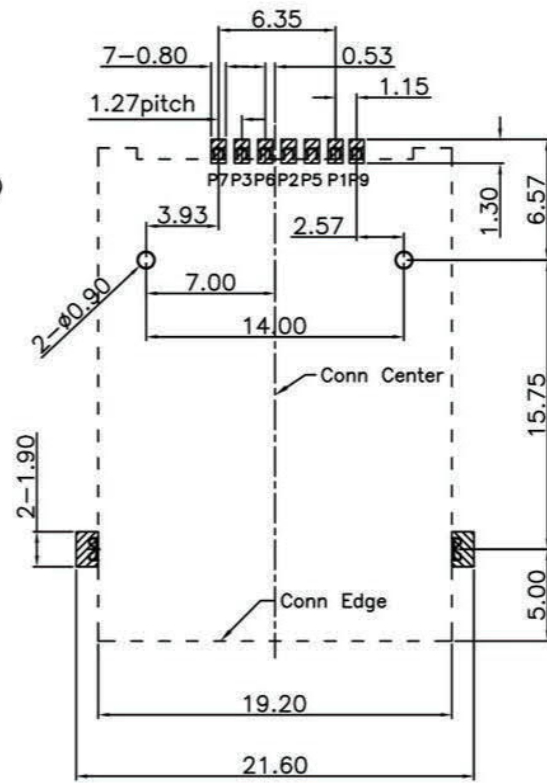
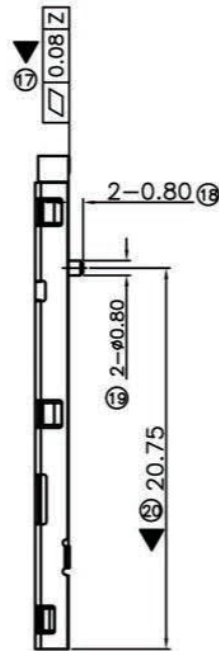


REV.	ECH.NO.	MODIFY.CONTENT	DATE
A0		NEW	2017/10/30


型号: KH-SIM1926-W

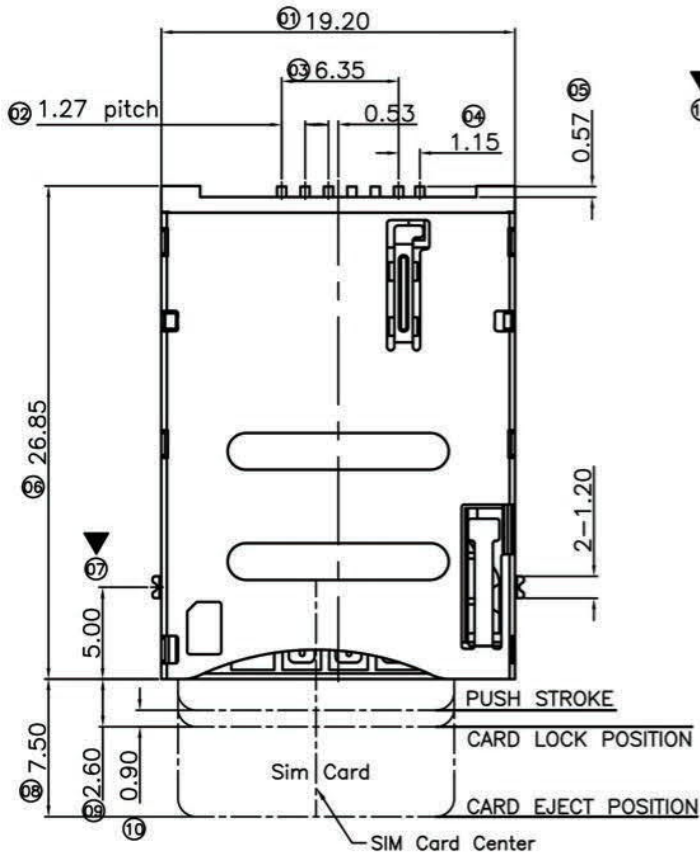


Specification:

- *Electrical Characteristics:
 - Current Rating:0.5A.
 - Withstanding Voltage:AC500V r.m.s.
 - Insulation Resistance:1000Megohms Minimum at DC 500V
 - Contact Resistance:100Miliohms Maximum.
- *Mechanical Characteristics:
 - Mating Cycles:5000 Insertions.
- *Environmenttal:
 - Operating Temperture:-40°To+60°
- *Material:
 - 1.Housing:HI-Temp plastic UL 94V-0 Rated.
 - 2.Contact:Copper Alloy.
 - 3.Shell:SUS.
- *Finish :
 - 1u" Gold plated on conatct area,100u"Min Tin plated on solder tails, Base Nickel :50u"Min
- *Packing:
 - Number of connectors:750Pcs/REEL
- *Measure:
 - ▼ Marked as the key test of QC and IPQC
 - ⊙ Marked as FAI test size
 - *PART NO.

PART NUMBER INFORMATION :

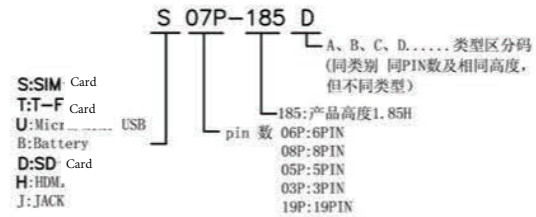

Connector terminal NO.	Pin NO.
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 5	GND:PWR signal and GND
Pin 6	VPP:Porgramming Voltage
Pin 7	I/O:Serial date input/output

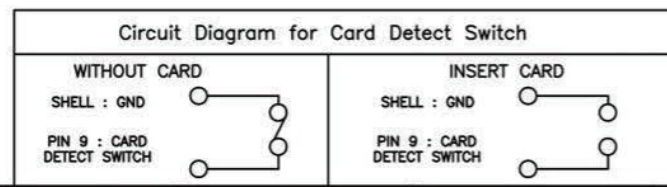

GENERAL TOLERANCE	DWG NO.	LZA0517-001	APPD:	Achilles	Scale	1:1
X.±0.20	x'.±5'	Title	CHKD:		UNIT	mm
.X±0.15	.x'±2'		DR:		Visual	
.XX±0.08	.xx'±1'	Part NO.	Date	2017/10/30	Edition	A0
.XXX±0.05	.xxx'±0.5'	SHENZHEN KINGHELM ELECTRONIC CO., LTD.		WWW.BDS666.COM		
SHEET 1/1		0755-83044319				