
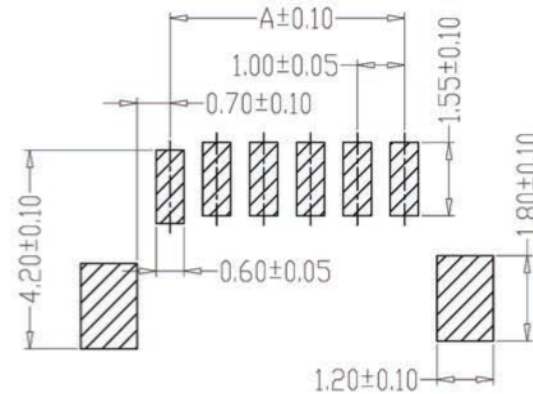


Model: KH-A1001LF- (02-20) A

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltage: 500V AC/minute
- 7、Material: Wafer Nylon 6T, UL94V-0
PIN Phosphoric bronze Tin-plated
Solder pad Phosphoric bronze Tin-plated

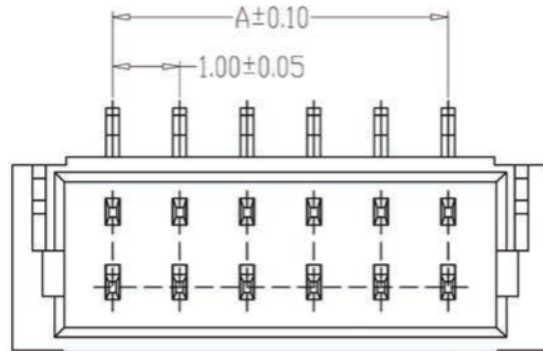

PCB LAYOUT

| NO. | mm | | |
|-------------|-------|-------|-------|
| | A | B | C |
| A1001LF-02A | 1.00 | 4.00 | 3.20 |
| A1001LF-03A | 2.00 | 5.00 | 4.20 |
| A1001LF-04A | 3.00 | 6.00 | 5.20 |
| A1001LF-05A | 4.00 | 7.00 | 6.20 |
| A1001LF-06A | 5.00 | 8.00 | 7.20 |
| A1001LF-07A | 6.00 | 9.00 | 8.20 |
| A1001LF-08A | 7.00 | 10.00 | 9.20 |
| A1001LF-09A | 8.00 | 11.00 | 10.20 |
| A1001LF-10A | 9.00 | 12.00 | 11.20 |
| A1001LF-11A | 10.00 | 13.00 | 12.20 |
| A1001LF-12A | 11.00 | 14.00 | 13.20 |
| A1001LF-20A | 19.00 | 22.00 | 21.20 |

| DRAWN | DESCRIPTION | DATE | GENERAL TOLERANCE | | DRAWING | HE JUNJU | PART NO. | REV. | A |
|-------|-------------|------|-------------------|--------------|----------|-----------------|--|----------------|---------------|
| | | | X. ±0.25 | X. ° ±2° | CHECK | 2013、07、01 | | | |
| | | | .X ±0.20 | .X ° ±1° | APPROVAL | LAI JIREN | TITLE | 1.0 DIP | SHEET |
| | | | .XX ±0.15 | .XX ° ±0.5° | | 2013、07、03 | WAVE SMT TYPE | | 1/1 |
| | | | .XXX ±0.10 | .XXX ° ±0.5° | | ZHANG SONGQIANG | CUTM. NO. | | |
| | | | | | UNITS | 2013、07、05 | | | |
| | | | | | MM | | SHENZHEN KINGHELM ELECTRONIC CO., LTD. | WWW.BDS666.COM | |
| | | | | | SCALE | | KH-A1001LF-06A | | 0755-83044319 |
| | | | | | 1:1 | | | | |