


# Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

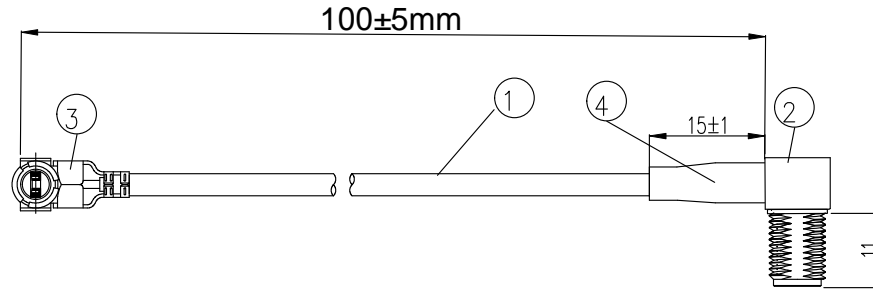

NOTES:

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 100V 10MS
  - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
  - 1.3. INSULATION RESISTANCE: 20M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
  - 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Casing	Black heat shrinkable sleeve, 2.5*15MM	AS
③	Joint	IPEX 1.13 Domestic Terminal	1
②	Joint	SMA-K Elbow with screw 11, Gold-plating	1
①	Coaxial line	RF1.13 Black Line OD: 1.10 mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

WWW.BDS666.COM

Model: KH-IPEX-SMA-W-100

0755-83044319

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2019 /03 /01	<b>I-pex1.13-to sma/f L=100MM</b>
	ENG.		
COMPUTER GENERATED IN SOLIDWORKS	MFG.		
DO NOT SCALE THIS DRAWING	Q.A.		
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1' ± 0.3 ± 0.25 ± 0.150		SIZE B
CUSTOMER P/N:			Number
			REV A
	SCALE: Free	TYPE	SHEET 1 OF 1

D

D

C

C

B

B

A

A

4

3

2

1

4

3

2

1