


REVISIONS				
REV NUMBER	DESCRIPTION	DWN	CHK	DATE
A	DESIGN			

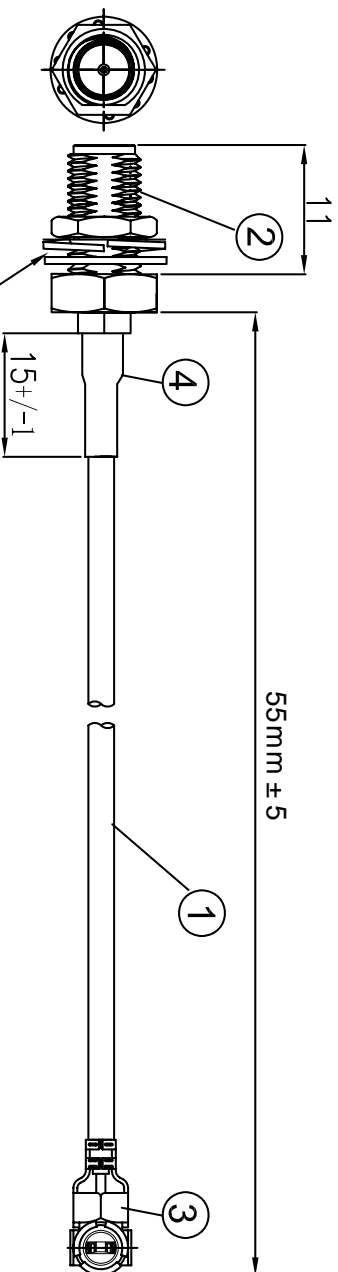

NOTES:  
 Three components are delivered with accessories (2 washers and 1 nut)

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
  - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPENSHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
  - 2.1. SEE TABLE
3. MECHANICAL:
  - 3.1. SMA PULL FORCE: 12.0KGS.
4. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX 1.13 Terminal, gold-plating	1
②	Joint	SMA-K, Split-type, 11 Screws, Gold-plating	1
①	Coaxial Cable	RF 1.13 Black Cable, OD:1.13mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

[WWW.BDS666.COM](http://WWW.BDS666.COM)

**KHB(RG113)-55-29**

**0755-83044319**

ALL DIMENSION ARE IN MM	DRAWN	Jamy	DATE	2018/05/04
	ENG.			
COMPUTER GENERATED IN SOLIDWORKS	MFG.			
DO NOT SCALE THIS DRAWING	Q.A.			
PROJECTION	GENERAL TOLERANCE FOR ANGLES XX ± 1° XX ± 0.3 XX ± 0.25 XXX ± 0.150			

CUSTOMER PIN:

TITLE			
RF CABLE			
I-PEX 1.13 TO SMA /F L=55 MM			
SIZE	Number	REV	
<b>B</b>		<b>A</b>	
SCALE: Free	TYPE	SHEET 1	OF 1