


Kinghelm®

REV. NUMBER		REVISIONS	
REV	NUMBER	DESCRIPTION	DATE
A		DESIGN	

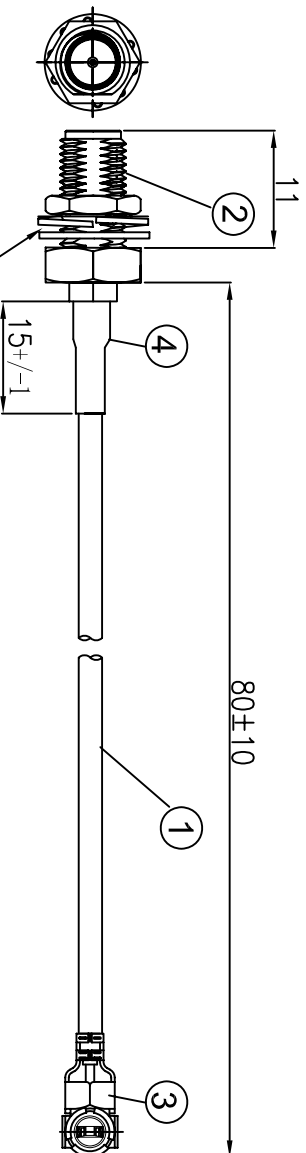

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHMMAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHMMIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

KHB(RG178) -80-28

0755-83044319

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④	Tube	Black Heat-shrink Tube, OD:2.0MM	AS
③	Terminal	High-quality Copy I-PEX 1.13 Terminal, gold-plating	1
②	Joint	SMA-K Split-type, 11 Screws, Gold-plating	1
①	Coaxial Cable	Rg178 Brown Cable, OD:1.80mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD.

WWW.BDS666.COM

ALL DIMENSION ARE IN MM	DRAWN James	DATE 2019-06-01
CHKD. Frank	2019-06-01	
COMPUTER GENERATED IN SOLIDWORKS	Appd. Scott	2019-06-01

DO NOT SCALE THIS DRAWING	GENERAL TOLERANCE FOR ANGLES	X.X	X.XX	X.XXX
PROJECTION	± 1°	± 0.3	± 0.25	± 0.150

SIZE Number	REV
B	A

I-PEX 178 TO SMA /F L=80mm

CUSTOMER P.N.:

SCALE: Free	TYPE	SHEET 1 OF 1
-------------	------	--------------

SCALE: Free	TYPE	SHEET 1 OF 1
-------------	------	--------------