


REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

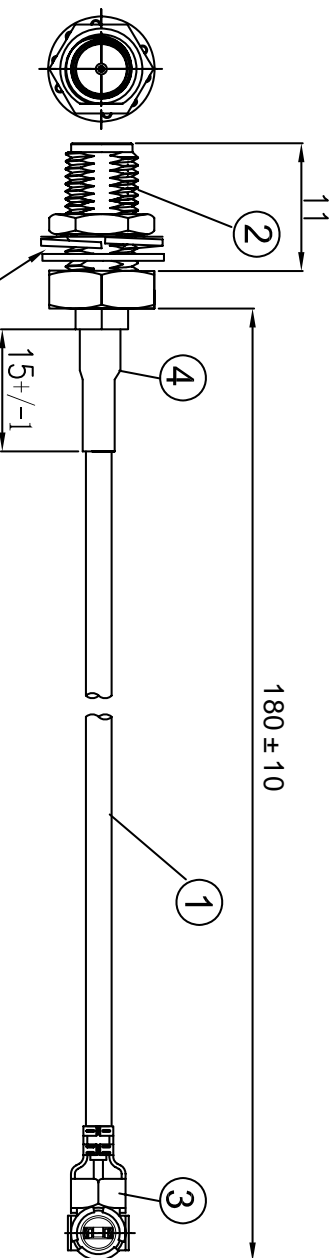

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
2. MATERIAL:
 - 2.1. SEE TABLE
3. MECHANICAL:
 - 3.1. SMA PULL FORCE: 12.0KGS.
4. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PATR NUMBER	DESCRIPTION	QTY
④		Black Heat-shrink Tube, OD:2.0MM	AS
③		High-quality Copy I-PEX 1.13 Terminal, gold-plating	1
②		SMA-K, split-type with 11 screws, gold-plating	1
①		RF1.13 Gray Cable, OD:1.13mm	AS

SHENZHEN KINGHELM ELECTRONIC CO., LTD. WWW.BDSS666.COM

KHB180-37(13)-28 **0755-83044319**

ALL DIMENSION ARE IN MM	DRAWN	Jamy	DATE	2018 /05 /04	TITLE
COMPUTER GENERATED IN SOLIDWORKS	ENG.				RF CABLE
DO NOT SCALE THIS DRAWING	MFG.				I-PEX 1.13 TO SMA /F L=180 MM
PROJECTION	Q.A.				SIZE Number
GENERAL TOLERANCE FOR ANGLES X.X ± 1° X.XX ± 0.3 X.XXX ± 0.25 X.XXXX ± 0.150					REV
					B
					SCALE: Free
					TYPE
					SHEET 1 OF 1
					REV
					A

CUSTOMER P/N:

4

3

2

1

A