


CUSTOMER :	Customer Part NO.
	Part Descripon

Item	Specification
NO. of conductors	N 6P-96P
Pitch	P 0.5 ± 0.05
Total Pitch	PT $2.5-47.5 \pm 0.08$
Total Length	L $25-20000 \pm 2$
Insulation Length	IL $25-20000 \pm 2$
Margin Width	M 0.5 ± 0.08
Total Width	W $3.5-48.5 \pm 0.08$
Strip Length	S1 $1.5-5 \pm 0.5$
Strip Length	S2 $1.5-5 \pm 0.5$
Reinforeing tape length	B1 $2.5-30 \pm 2$
Reinforeing tape length	B2 $2.5-30 \pm 2$
Slanting	A ≤ 0.3
Over lap	/
Terminal thickness	t1 0.3 ± 0.02
Thickness insulation	t 0.12 ± 0.02
Conductor thickness	Ct 0.035 ± 0.01

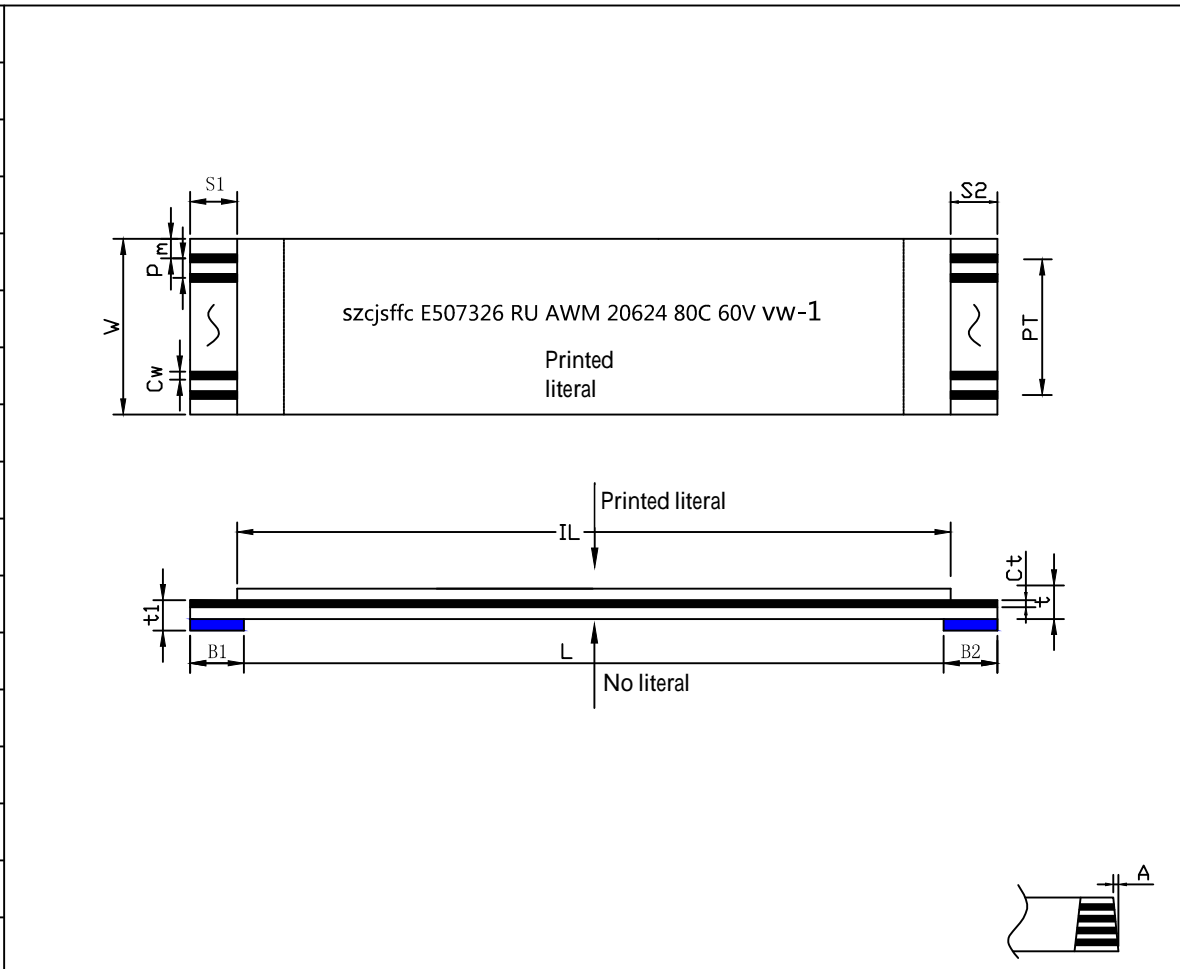

Conductor width	Cw 0.3 ± 0.03
Supporting Tapc Color	Blue
PET(Supporting Tapc Color)	0.225mm
PET(Insulation)	0.043mm
PET(Insulation)	0.043mm
Rev	A

Storage condition :**Recommended:**

Temp: $15^{\circ} C \sim 25^{\circ} C$ Humidity: $30 \sim 60RH\%$

Drawing Not TO Scale Hidden Lines Not Shown	Discharge Date	Review Date	Drawing NO
	2021-05-19		
	SHENZHEN KINGHELM ELECTRONIC CO., LTD		WWW.BDS666.COM
	KH-FFC-A0.5-12P-200MM		0755-83044319