


CUSTOMER :		Customer Part NO.
		Part Descripon
Item	Specification	
NO. of conductors	N	6P-96P
Pitch	P	0.5±0.05
Total Pitch	PT	2.5-47.5±0.08
Total Length	L	25-20000±2
Insulation Length	IL	25-20000±2
Margin Width	M	0.5±0.08
Total Width	W	3.5-48.5±0.08
Strip Length	S1	1.5-5±0.5
Strip Length	S2	1.5-5±0.5
Reinforeing tape length	B1	2.5-30±2
Reinforeing tape length	B2	2.5-30±2
Slanting	A	≤0.3
Over lap	/	
Terminal thickness	t1	0.3±0.02
Thickness insulation	t	0.12±0.02
Conductor thickness	Ct	0.035±0.01
Conductor width	Cw	0.3±0.03
Supporting Tapc Color	Blue	
PET(Supporting Tapc Color)	0.225mm	
PET(Insulation)	0.043mm	
PET(Insulation)	0.043mm	
Rev	A	

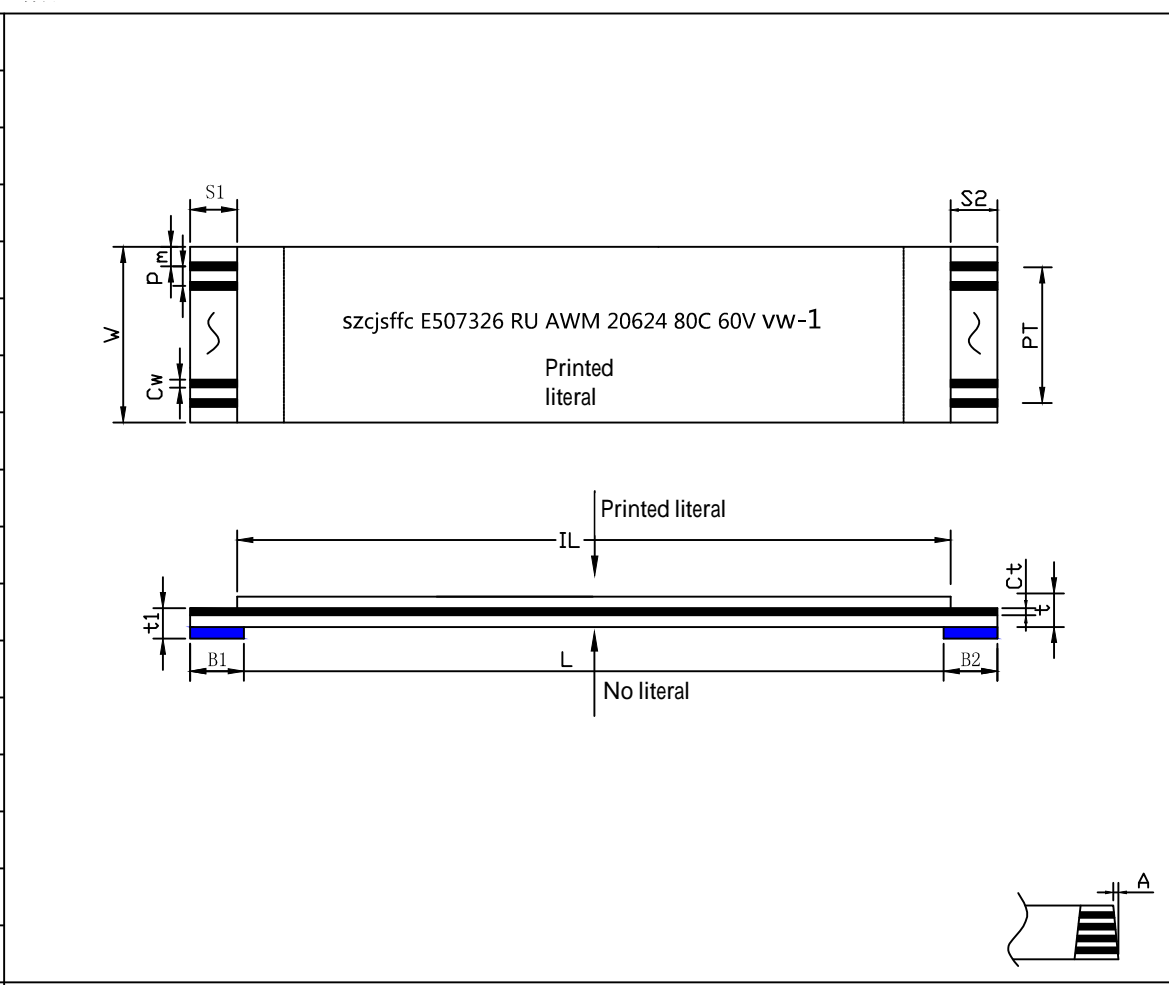

Storage condition :Recommended:			
Temp:15° C~25° C		Humidity:30~60RH%	
Drawing Not TO Scale Hidden Lines Not Shown	Discharge Date	Review Date	Drawing NO
	2021-05-19		
 Unit(单位):mm	SHENZHEN KINGHELM ELECTRONIC CO., LTD		WWW.BDS666.COM
	KH-FFC-A0.5-24P-200MM		0755-83044319