



Schematic of PCB Installation Dimensions

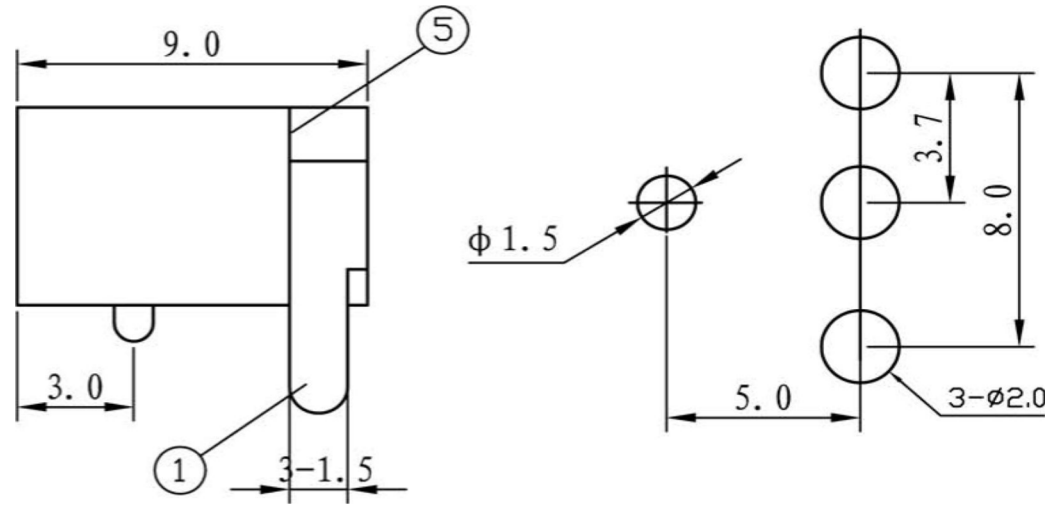

Schematic of PCB



Serial Number	Part Number or Code	Designation	Quantity	Materials	Remarks
5		Base	IPCS	PA66(Black)	
4		Contact Pin	IPCS	H95-1BrassØ=1.3	Electroplating: Tin
3		Static Wave	IPCS	H62 Brass t=0.30	Electroplating: Silver
2		Movable v	IPCS	65Mn Steel t=0.20	Electroplating: Silver
1		Pins	IPCS	H62 Brass t=0.30	Electroplating: Silver

Specification:

Operation Condition: -40- 55°C  
 Rating: DC 30V 0. 5A Contact  
 Resistance: ≤0. 03Ω Insulation  
 Resistance: ≥100Ω DC250V  
 Withstand Voltage: AC 500V  
 (50Hz) /min  
 Insertion and Extraction  
 Force: 3~20N  
 Mechanical Life: 5000 times

TOLERANCE: UNLESS OTHERWISE SPECIFIED		
UNOER 1. 5 ± 0.	1. 5 ~ 10 ± 0.	OVER 10 ±0.2

					SHEN ZHEN KINGHELM ELECTRONIC CO., LTD.		WWW.BDS666.COM			
					KH-DC-005B-2.0		0755-83044319			
Mark	Number of Revised	Revised Order Number	Signature	Date	DC-005B		Drawing Mark	Weight	Scale	
Drawn	JiRen Lai						A   B		1:1	
Designed	SongQiang Zhang						1 Page in Total		Page 1	
Checked	SongQiang Zhang									
Craft					Electrical Socket					
Standardization	Standardized									
Approval	Approved									